

esse-ci


ABSENT HCL



2700K-6500K tunable white version with constant flux
for HCL ESSE-CI technologies.
DALI DT8 Driver.


OPTIC

- DPL: Diffuser in Diamond Prism LED Technology with UGR<19 for ambient with display screen equipment
- PG: Diffuser for diffused emission with UGR<22

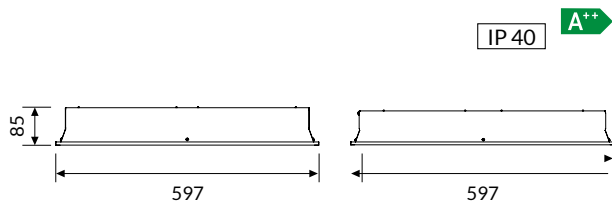


VERSIONS

DPL

COD		lm
41DPL38HCL	38W	3840

PG

COD		lm
41PG38HCL	38W	3994