

Accessories



46AA13
46AA1330
Single wire 1500mm / 3000mm long adjustable suspension kit.



46AA14
Ceiling mounting kit.



00AA16
00AA165P
00AA167P
00AA1610P
3, 5, 7, 10 poles-ceiling rose power cable. Cable length 2000mm.



46AA09
End caps kit.



46AA11
Electrified linear joint.



46AA05
2 ways joint.



46AA06
3 ways joint.



46AA07
4 ways joint.



46DR10L490A90: 10W(HE) 4000K
46DR10L390A90: 10W(HE) 3000K
46DR20L490A90: 20W(HO) 4000K
46DR20L390A90: 20W(HO) 3000K
2 ways luminous joint 90°.



46CLD5000
46CLD10000
CLD optic (collimated diffuser, UGR<16), 10m coil to be measured and cut on site to provide continuous gap-free light diffusion.



46PG5000
46PG10000
Methacrylate satin diffuser UGR<22, 10m coil to be measured and cut on site to provide continuous gap-free light diffusion.



46TR5000
46TR10000
Optional transparent diffuser for indirect emission, 10m coil to be measured and cut on site to provide continuous gap-free light diffusion.



46AS3000
Asymmetric lens, 3000mm.




46MC500: 5 m
46MC1000: 10 m
Blind module connection in painted coil adaptable to size on site.


Technical Note

ASSEMBLY LAYOUT


ARKEON FREE PROFILE - ARKEON FREE - ARKEON FREE SPOT

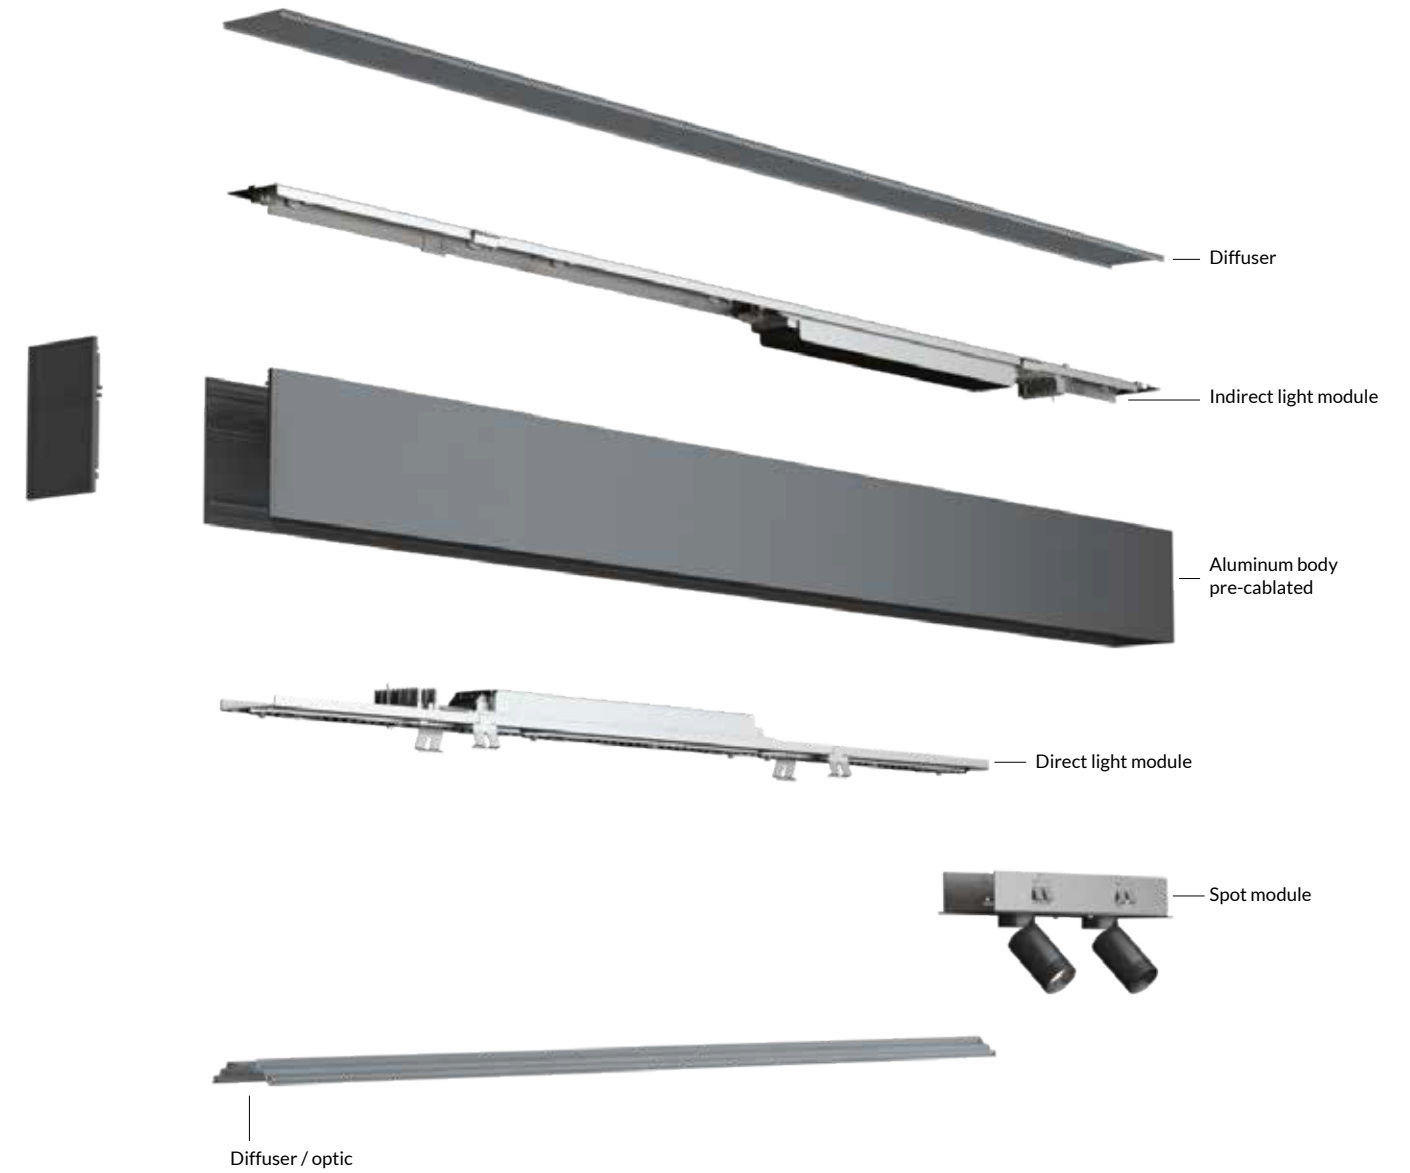


PHOTOMETRIC CURVES OF OPTICS:




CLD optic



PG optic



asymmetric optic



High Contrast optic