


CUBE MINI

ID CODE: 49

A contemporary range of square downlights with **compact dimensions**, for both **recessed and surface installation**. CUBE MINI is offered in both singular form, or with an innovative jointing system that allows the designer freedom to connect fixtures together to create patterns of light to suit the architectural requirements of any project. The deep-set LED creates **excellent glare control** for **optimum visual comfort**.

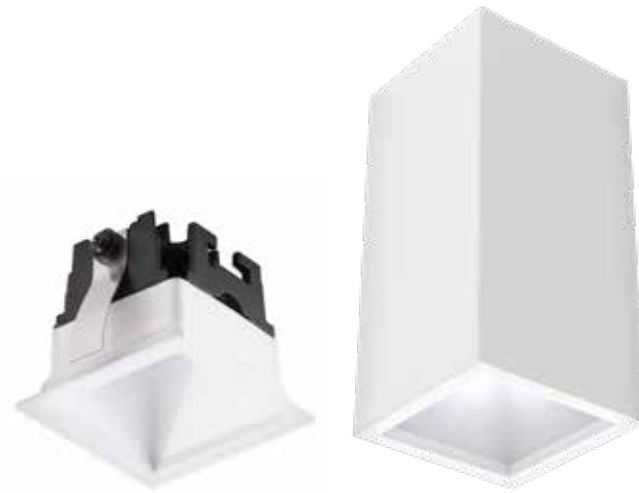

Design
esse-ci

FEATURES

- Direct Emission
- UGR <19; <22
- IP 40

LED

- 3000K/4000K
- >90 lm/W
- CRI >90
- Eye safety: RG0/RG1
- Mac Adams 3
- L80/B10 >50.000h

CERTIFICATIONS

- CE
- A+
- 5 years warranty

ON REQUEST

- DALI - RDD code (verify the version)
- Bluetooth - BT code (verify the version)
- Emergency kit 1/3 hour EM/EM 3h code

Specifications Built-in driver.


Optic

- Primary PC frosted diffuser, UGR<19
- PG version with additional frosted PC coplanar screen, UGR<22

Body Body-diffuser made in die-cast aluminium with epoxy powder coating.

Colour


- White RAL 9003 matt - Code: B
- Black RAL 9005 matt - Code: C8

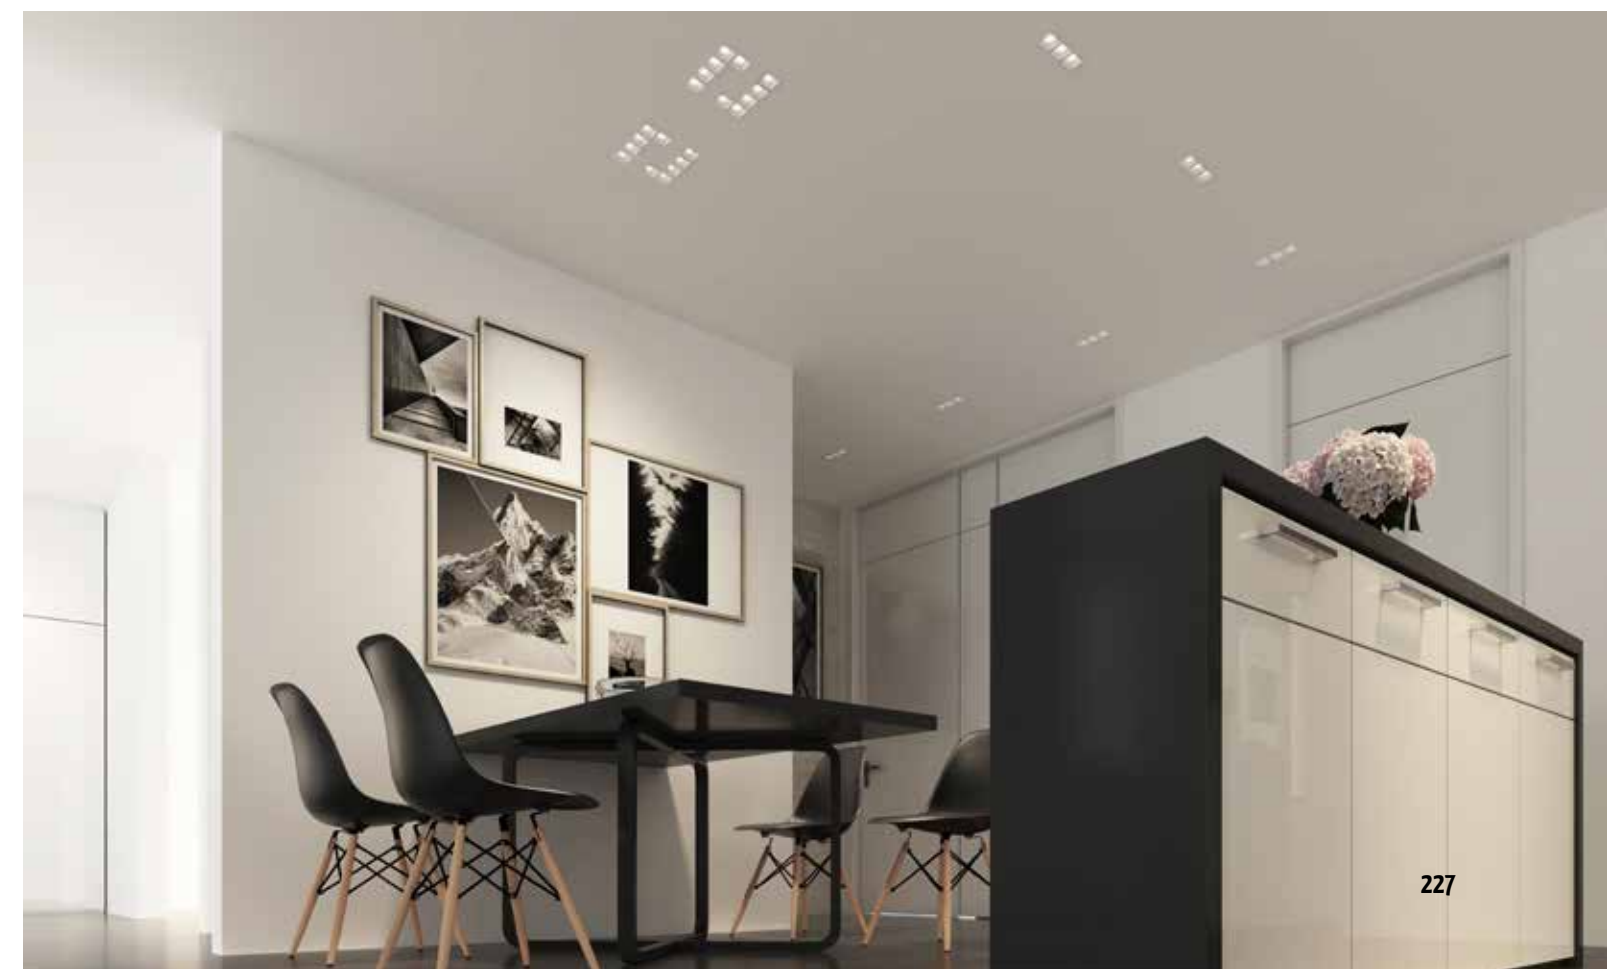


CUBE MINI RECESSED

OPTIC

Primary PC frosted diffuser, UGR<19.

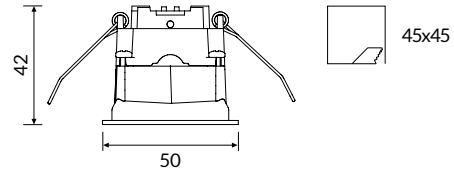

IP 40 A+

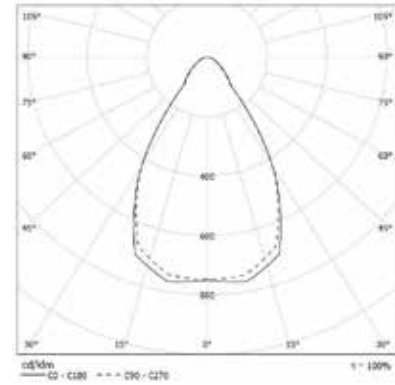

COLOUR TEMPERATURE

4000K

COD	💡	lm
49DR5L490	5W	459
49DR8L490	8W	729

3000K


COD	💡	lm
49DR5L390	5W	418
49DR8L390	8W	663




CUBE MINI CEILING

OPTIC

Primary PC frosted diffuser, UGR<19.

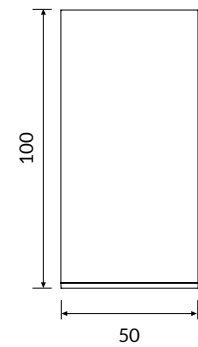

IP 40 A+

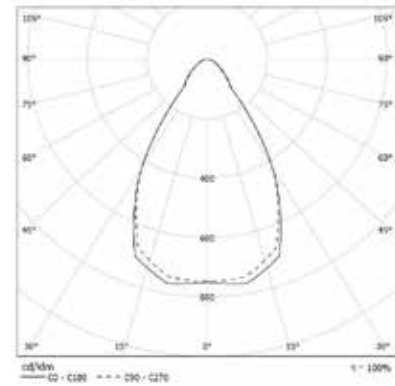

COLOUR TEMPERATURE

4000K

COD	💡	lm
49DR5L490C	5W	459
49DR8L490C	8W	729

3000K

COD	💡	lm
49DR5L390C	5W	418
49DR8L390C	8W	663

Accessories




49AAPG
Additional frosted PC coplanar screen, UGR<22.



49AA11
Bracket for multiple recessed installation.

Technical Note

MULTIPLE INSTALLATION

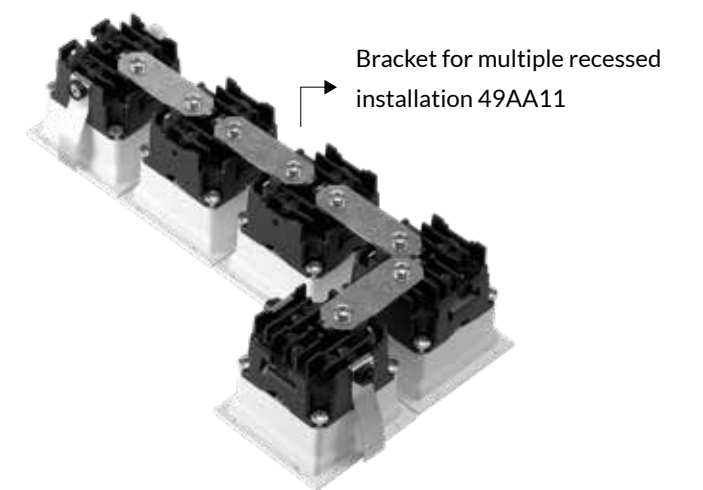

Bracket for multiple recessed installation 49AA11