

FLIP

ID CODE: 42

FLIP is the **revolutionary** new way to light spaces that have 24mm **exposed grid suspended ceilings**. The ultra-slim linear fixture can be pattern formed to create contemporary arrays of light, allowing designers much greater freedom rather than designing with standard panel fixtures.




The controlled **direct emission** creates a **low glare (UGR<16)** lit environment, making FLIP ideal for both office lighting and for general spaces. **Broad lateral emission** means the product takes advantage of the false ceiling as a reflective surface to improve contrast ratio and therefore **maximizing visual comfort**. PG version also available for places where diffused lighting is recommended.

FLIP - free your creativity.









Design
esse-ci

FEATURES

-  Direct Emission
-  UGR <16; <22
-  IP 40



LED

-  3000K/4000K
-  >125 lm/W
-  CRI >90
-  Eye safety: RG0/RG1
-  Mac Adams 3
-  L80/B10 >50.000h

CERTIFICATIONS

-  CE
-  A+
-  5 years warranty

ON REQUEST

-  DALI - RDD code (verify the version)
-  Emergency kit 1/3 hour EM/EM.3h code

Optics


- Polycarbonate lens with ILC (Indirect Light Control) technology to optimize the indirect lighting element (UGR<16)
- PG diffuser for soft diffusion with UGR<22



FLIP

OPTIC

Polycarbonate lens with ILC (Indirect Light Control) technology to optimize the indirect lighting element. UGR<16.




COLOUR TEMPERATURE

4000K

COD	⚡	lm	mm
42PC9L490	9W	1026	599



IP 40 A*

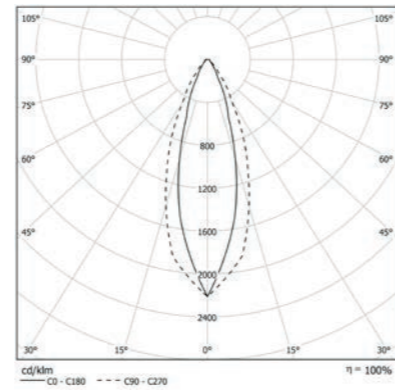


3000K

COD	⚡	lm	mm
42PC9L390	9W	995	599

FLIP PG

OPTIC

PG lens in frosted polycarbonate. UGR<22.




COLOUR TEMPERATURE

4000K

COD	⚡	lm	mm
42PO9L490	9W	1020	599



IP 40 A*

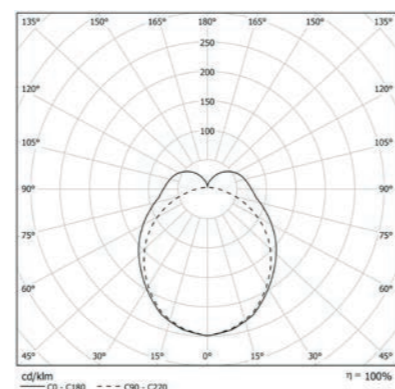

3000K

COD	⚡	lm	mm
42PO9L390	9W	989	599

Accessories


CONNECTOR



42AA11EL
Straight electrified connector.



42AA05EL
2 ways 90° electrified connector.



42AA06EL
3 ways electrified connector.



42AA07EL
4 ways electrified connector.

DRIVER



42LC1X
Driver 24V 35W for 1 fixture.



42LC1XRDD
Driver 24V 35W for 1 fixture, DALI version.



42LC4X
Driver 24V 60W up to 4 fixtures.



42LC4XRDD
Driver 24V 60W up to 4 fixtures, DALI version.



42LC10X
Driver 24V 100W up to 10 fixtures.



42LC10XRDD
Driver 24V 100W up to 10 fixtures, DALI version.



42AA14
Kit for installation on plasterboard or semi-recessed panels.

Technical Note

RAPID INSTALLATION



Thanks to the electrified connector and side clips, installation to the ceiling structure is immediate.