

GROOVE DISPLAY IP54




ID CODE: 43

GROOVE DISPLAY IP54 is a product created specifically for recessed applications that demand high ingress protection against dust and moisture. Perfectly complimenting the interior GROOVE collection, the product has been designed to be installed either as a single luminaire, or with accessories in **continuous rows**, making this a unique product that allows designers freedom to create stunning installations. The **aluminum body and the flexible diffuser** with coextruded gaskets, guarantee maximum performance, achieving a protection rating of IP54, making the collection ideal for industrial / commercial applications, or even for **protected outdoor use**.







See also:

GROOVE	p. 58
GROOVE IP54	p. 432
GROOVE HCL	p. 480
GROOVE DISPLAY	p. 122
GROOVE DISPLAY HCL	p. 481

FEATURES

-  Direct Emission
-  UGR <22
-  IP 54




LED

-  3000K/4000K
-  >102 lm/W
-  CRI >90
-  Eye safety: RG0/RG1
-  Mac Adams 3
-  L80/B10 >50.000h

CERTIFICATIONS

-  CE
-  A+
-  5 years warranty

ON REQUEST

-  DALI - RDD code (verify the version)
-  Emergency kit 1/3 hour EM/EM 3h code
-  2700K - 5000K



Design
esse-ci

Specifications Built-in driver.

Optic Methacrylate satin antistatic diffuser screen, UGR<22.

Body Aluminum extruded body with epoxy powder coating.

Colour ○ White matt RAL 9003 - Code: B
● Black matt RAL 9005 - Code: C8




GROOVE DISPLAY IP54 LOW POWER


OPTIC

Methacrylate satin antistatic diffuser screen, UGR<22 to be ordered separately.

End caps not included. See accessories on p.441.

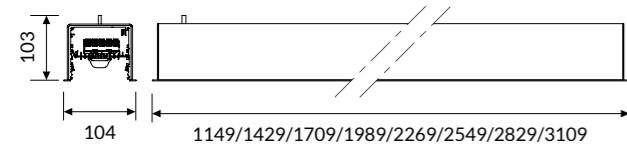

IP 54 A++

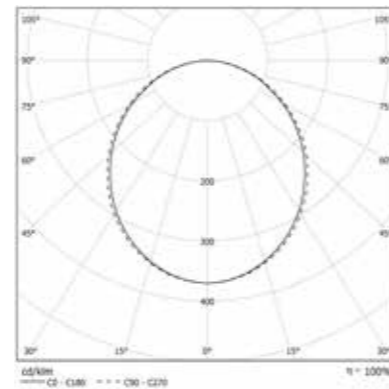

COLOUR TEMPERATURE

4000K


COD	💡	lm	mm
43AA24L490F54	24W	2436	1149
43AA30L490F54	30W	3045	1429
43AA36L490F54	36W	3654	1709
43AA42L490F54	42W	4263	1989
43AA48L490F54	48W	4872	2269
43AA54L490F54	54W	5481	2549
43AA60L490F54	60W	6090	2829
43AA66L490F54	66W	6699	3109

GROOVE DISPLAY IP54 HIGH POWER


OPTIC

Methacrylate satin antistatic diffuser screen, UGR<22 to be ordered separately.

End caps not included. See accessories on p.441.

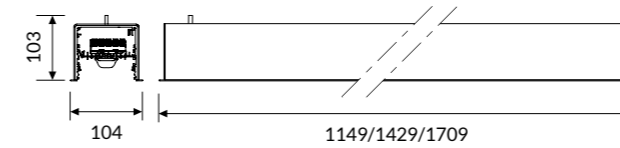

IP 54 A++

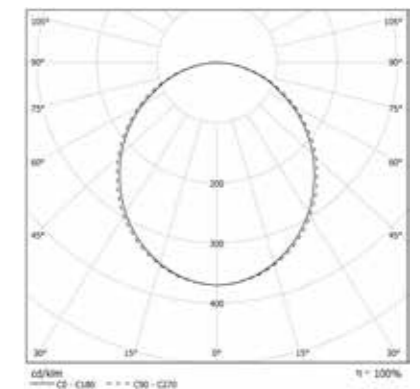

COLOUR TEMPERATURE

4000K

COD	💡	lm	mm
43AA45L490HPF54	45W	4482	1149
43AA57L490HPF54	57W	5677	1429
43AA68L490HPF54	68W	6773	1709

3000K

COD	💡	lm	mm
43AA45L390HPF54	45W	4172	1149
43AA57L390HPF54	57W	5284	1429
43AA68L390HPF54	68W	6304	1709

Accessories



43AA09F54

End caps kit.



43AA11F54

Linear joint with seal.



43PG1152
43PG1432
43PG1712
43PG1992
43PG2272
43PG2552
43PG2832
43PG3112

PG diffuser from 1152/1432/1712/1992/2272/2552/2832/3112mm.



43PG10000

Methacrylate satin diffuser UGR<22, 10m coil to be measured and cut on site to provide continuous gap-free light diffusion.