

esse-ci

GROOVE HCL




2700K-6500K tunable white version with constant flux for HCL ESSE-CI technologies.

DALI DT8 Driver.

OPTIC


Direct emission with DPL technology diffuser (UGR<19).

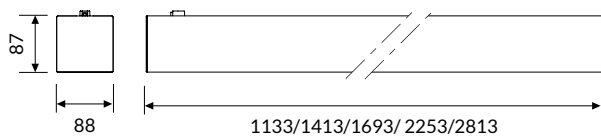

IP 40 A++

VERSIONS

DPL

COD		lm	mm
43DR48DPLHCL	48W	3840	1133
43DR60DPLHCL	60W	4800	1413
43DR72DPLHCL	72W	5760	1693
43DR96DPLHCL	96W	7680	2253
43DR120DPLHCL	120W	9600	2813