

# HALL LED IP65





ID CODE: 38

A series of high performance LED downlights that are designed for exterior use or any area that demands a high ingress protection rating against both dust and water. HALL LED IP65 features an integrated driver making this a perfect product for installers to use, as this connects straight to mains. A range of beam angles and outputs is offered alongside a dedicated asymmetric version for wall washing, ensuring there is a product to suit almost any application.









Design  
esse-ci

## FEATURES

-  Direct Emission
-  UGR < 19
-  IP 65
-  -20°C +40°C




## LED

-  3000K/4000K
-  >90 lm/W; >126 lm/W
-  CRI >90
-  Eye safety: RG0/RG1
-  Mac Adams 3
-  L80/B10 >50.000h

## CERTIFICATIONS

-  CE
-  A+
-  5 years warranty

## ON REQUEST

-  DALI - RDD code (verify the version)
-  Emergency kit 1/3 hour EM/EM 3h code
-  5000K

**Specifications** · CoB LED technology  
· Integrated driver

**Optic** · EASY: internal aluminium reflectors from 15°- 24°- 36°- 50° beam angles  
· MEDIUM e LARGE: internal aluminium reflectors from 10°- 12°- 20°- 40°- 70° beam angles  
· ACCENT LIGHT  
· HIGH WALLWASHER  
· WIDE WALLWASHER

**Body** Manufactured from pressure die-cast aluminum with epoxy powder coating.

**Colour** ○ White RAL 9003 wrinkled - Code: B  
● Black RAL 9005 wrinkled - Code: C8



OUTDOOR IP



HALL LED IP65

OUTDOOR IP

### HALL LED IP65 EASY

**OPTIC**

Internal aluminum reflectors:  
15°- 24°- 36°- 50° beam angles.  
CUT OFF > 30°.

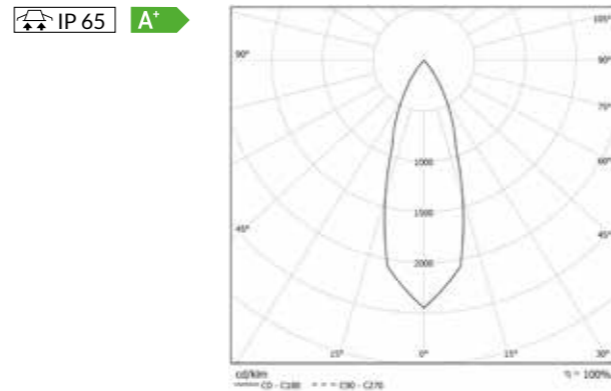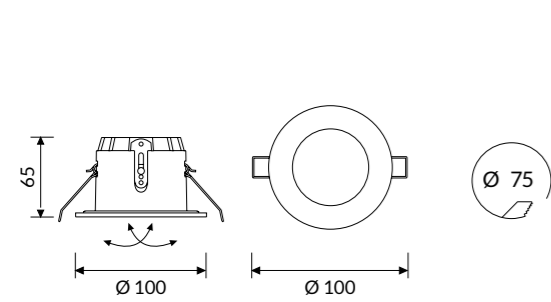

**COLOUR TEMPERATURE** **4000K**

COD	Light Bulb Icon	lm
38VT6L49015E65	6W 15°	599
38VT6L49024E65	6W 24°	599
38VT6L49036E65	6W 36°	599
38VT6L49050E65	6W 50°	599



**COLOUR TEMPERATURE** **3000K**

COD	Light Bulb Icon	lm
38VT6L39015E65	6W 15°	579
38VT6L39024E65	6W 24°	579
38VT6L39036E65	6W 36°	579
38VT6L39050E65	6W 50°	579

### HALL LED IP65 MEDIUM

**OPTIC**

Internal aluminum reflectors:  
10°- 20°- 40°- 70° beam angles.  
CUT OFF > 30°.

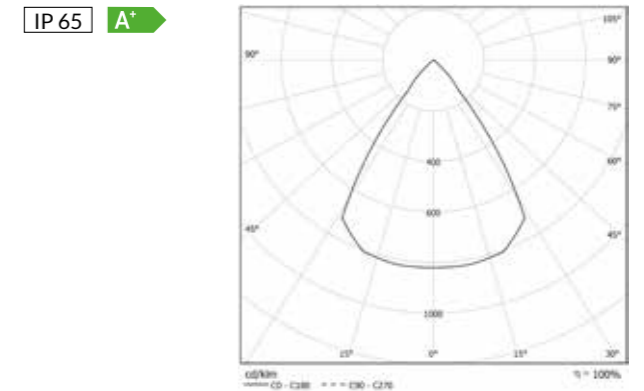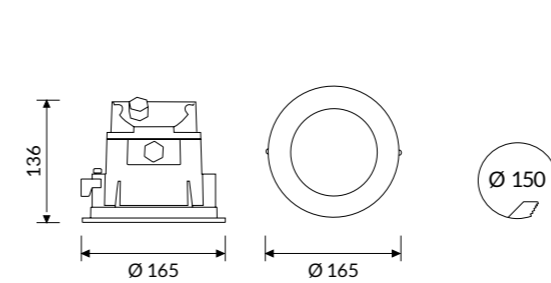

**COLOUR TEMPERATURE** **4000K**

COD	Light Bulb Icon	lm
38VT7L49010M65	7W 10°	655
38VT7L49020M65	7W 20°	655
38VT7L49040M65	7W 40°	655
38VT7L49070M65	7W 70°	655
38VT18L49010M65	18W 10°	1595
38VT18L49020M65	18W 20°	1595
38VT18L49040M65	18W 40°	1595
38VT18L49070M65	18W 70°	1595


**COLOUR TEMPERATURE** **3000K**

COD	Light Bulb Icon	lm
38VT7L39010M65	7W 10°	627
38VT7L39020M65	7W 20°	627
38VT7L39040M65	7W 40°	627
38VT7L39070M65	7W 70°	627
38VT18L39010M65	18W 10°	1529
38VT18L39020M65	18W 20°	1529
38VT18L39040M65	18W 40°	1529
38VT18L39070M65	18W 70°	1529


### HALL LED IP65 MEDIUM ACCENT LIGHT

**OPTIC**

Accent light.  
Transparent glass with internal aluminum reflectors:  
25°- 45°- 60°- 80° beam angles.  
CUT OFF > 30°.

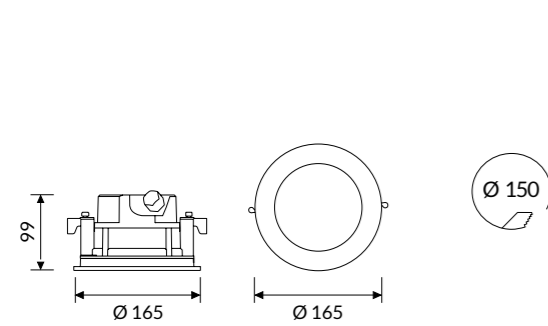

IP 65 A+  
IK10

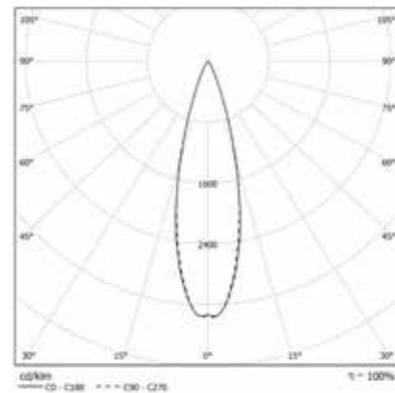

**COLOUR TEMPERATURE** **4000K**

COD	Light Bulb Icon	lm
38AL13L49025M65	13W 25°	1326
38AL13L49045M65	13W 45°	1326
38AL13L49060M65	13W 60°	1326
38AL13L49080M65	13W 80°	1326


**COLOUR TEMPERATURE** **3000K**

COD	Light Bulb Icon	lm
38AL13L39025M65	13W 25°	1207
38AL13L39045M65	13W 45°	1207
38AL13L39060M65	13W 60°	1207
38AL13L39080M65	13W 80°	1207

### HALL LED IP65 MEDIUM HIGH WALLWASHER

**OPTIC**

HW - High wallwasher.  
Transparent glass with high asymmetric lens.  
CUT OFF > 30°.

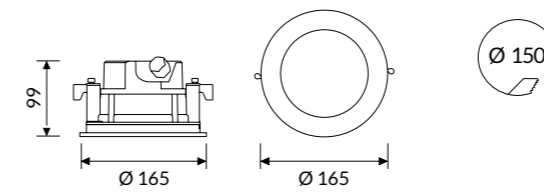


**COLOUR TEMPERATURE** **4000K**

COD	Light Bulb Icon	lm
38HA13L490M65	13W	1326

### HALL LED IP65 MEDIUM WIDE WALLWASHER

**OPTIC**

WW - Wide wallwasher.  
Transparent glass with wide beam asymmetric lens.  
CUT OFF > 30°.

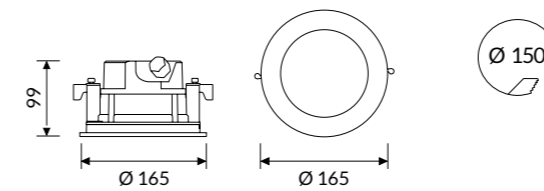


**COLOUR TEMPERATURE** **4000K**

COD	Light Bulb Icon	lm
38WA13L490M65	13W	1326



IP 65 A+  
IK10

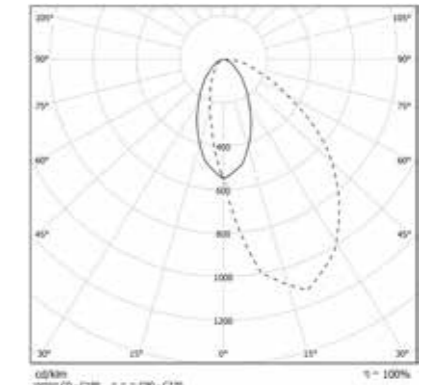


**COLOUR TEMPERATURE** **3000K**

COD	Light Bulb Icon	lm
38HA13L390M65	13W	1207



IP 65 A+  
IK10

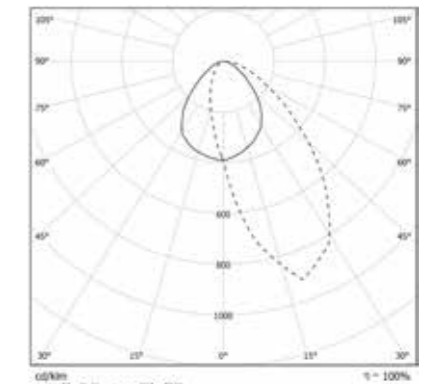

**COLOUR TEMPERATURE** **3000K**

COD	Light Bulb Icon	lm
38WA13L390M65	13W	1207



# HALL LED IP65 LARGE

## OPTIC


Internal aluminum reflectors:  
12°- 20°- 40°- 70° beam angles.  
CUT OFF > 30°.




IP 65 A\*

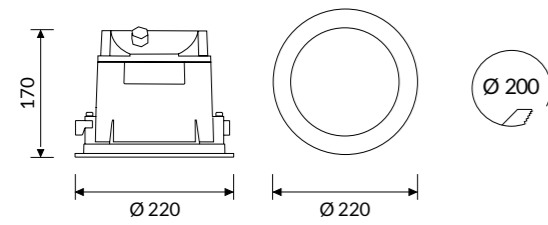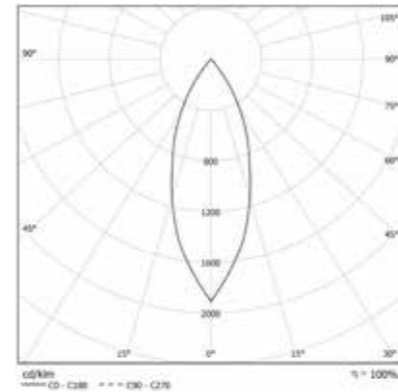

## Accessories

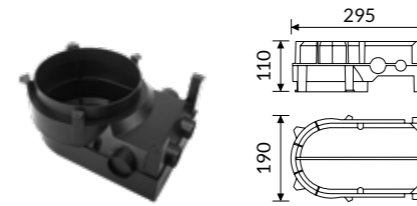


**38AABCM**  
HALL LED IP65 MEDIUM box for recessed installation on concrete.

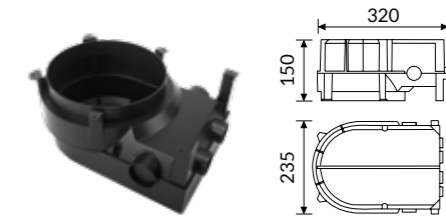

**38AABCL**  
HALL LED IP65 LARGE box for recessed installation on concrete.

## Technical Note


HALL IP65 MEDIUM ACCENT LIGHT



HALL IP65 MEDIUM HIGH WALLWASHER



HALL IP65 MEDIUM WIDE WALLWASHER



### COLOUR TEMPERATURE

4000K

3000K

COD	Light Icon	lm
38VT18L49012L65	18W 12°	2316
38VT18L49020L65	18W 20°	2316
38VT18L49040L65	18W 40°	2316
38VT18L49070L65	18W 70°	2316
38VT25L49012L65	25W 12°	3151
38VT25L49020L65	25W 20°	3151
38VT25L49040L65	25W 40°	3151
38VT25L49070L65	25W 70°	3151

COD	Light Icon	lm
38VT18L39012L65	18W 12°	2240
38VT18L39020L65	18W 20°	2240
38VT18L39040L65	18W 40°	2240
38VT18L39070L65	18W 70°	2240
38VT25L39012L65	25W 12°	3048
38VT25L39020L65	25W 20°	3048
38VT25L39040L65	25W 40°	3048
38VT25L39070L65	25W 70°	3048

### INSTALLATION:

