

# HALL LED ESSENTIAL CEILING




ID CODE: 28

The simple shape and the recessed optic of this surface mounted LED downlight creates a contemporary aesthetic, whilst optimising the light distribution in a homogeneous way. Characterized by a **pure and essential form**, is ideal for residential and hospitality applications.









Design  
esse-ci

## FEATURES

-  Direct Emission
-  UGR <22
-  IP 44




## LED

-  3000K/4000K
-  >92 lm/W
-  CRI >90
-  Eye safety: RG0/RG1
-  Mac Adams 3
-  L80/B10 >50.000h

## CERTIFICATIONS

-  CE
-  A
-  5 years warranty

## ON REQUEST


-  DALI - RDD code (verify the version)
-  Bluetooth - BT code (verify the version)
-  2700K - 5000K

**Specifications** · SMD LED technology  
· Built-in driver

**Optic** Polycarbonate frosted diffuser.

**Body** Polycarbonate body and die-cast aluminum heat sink.

**Colour** ○ White RAL 9003 matt - Code: B  
● Black RAL 9005 matt - Code: C8

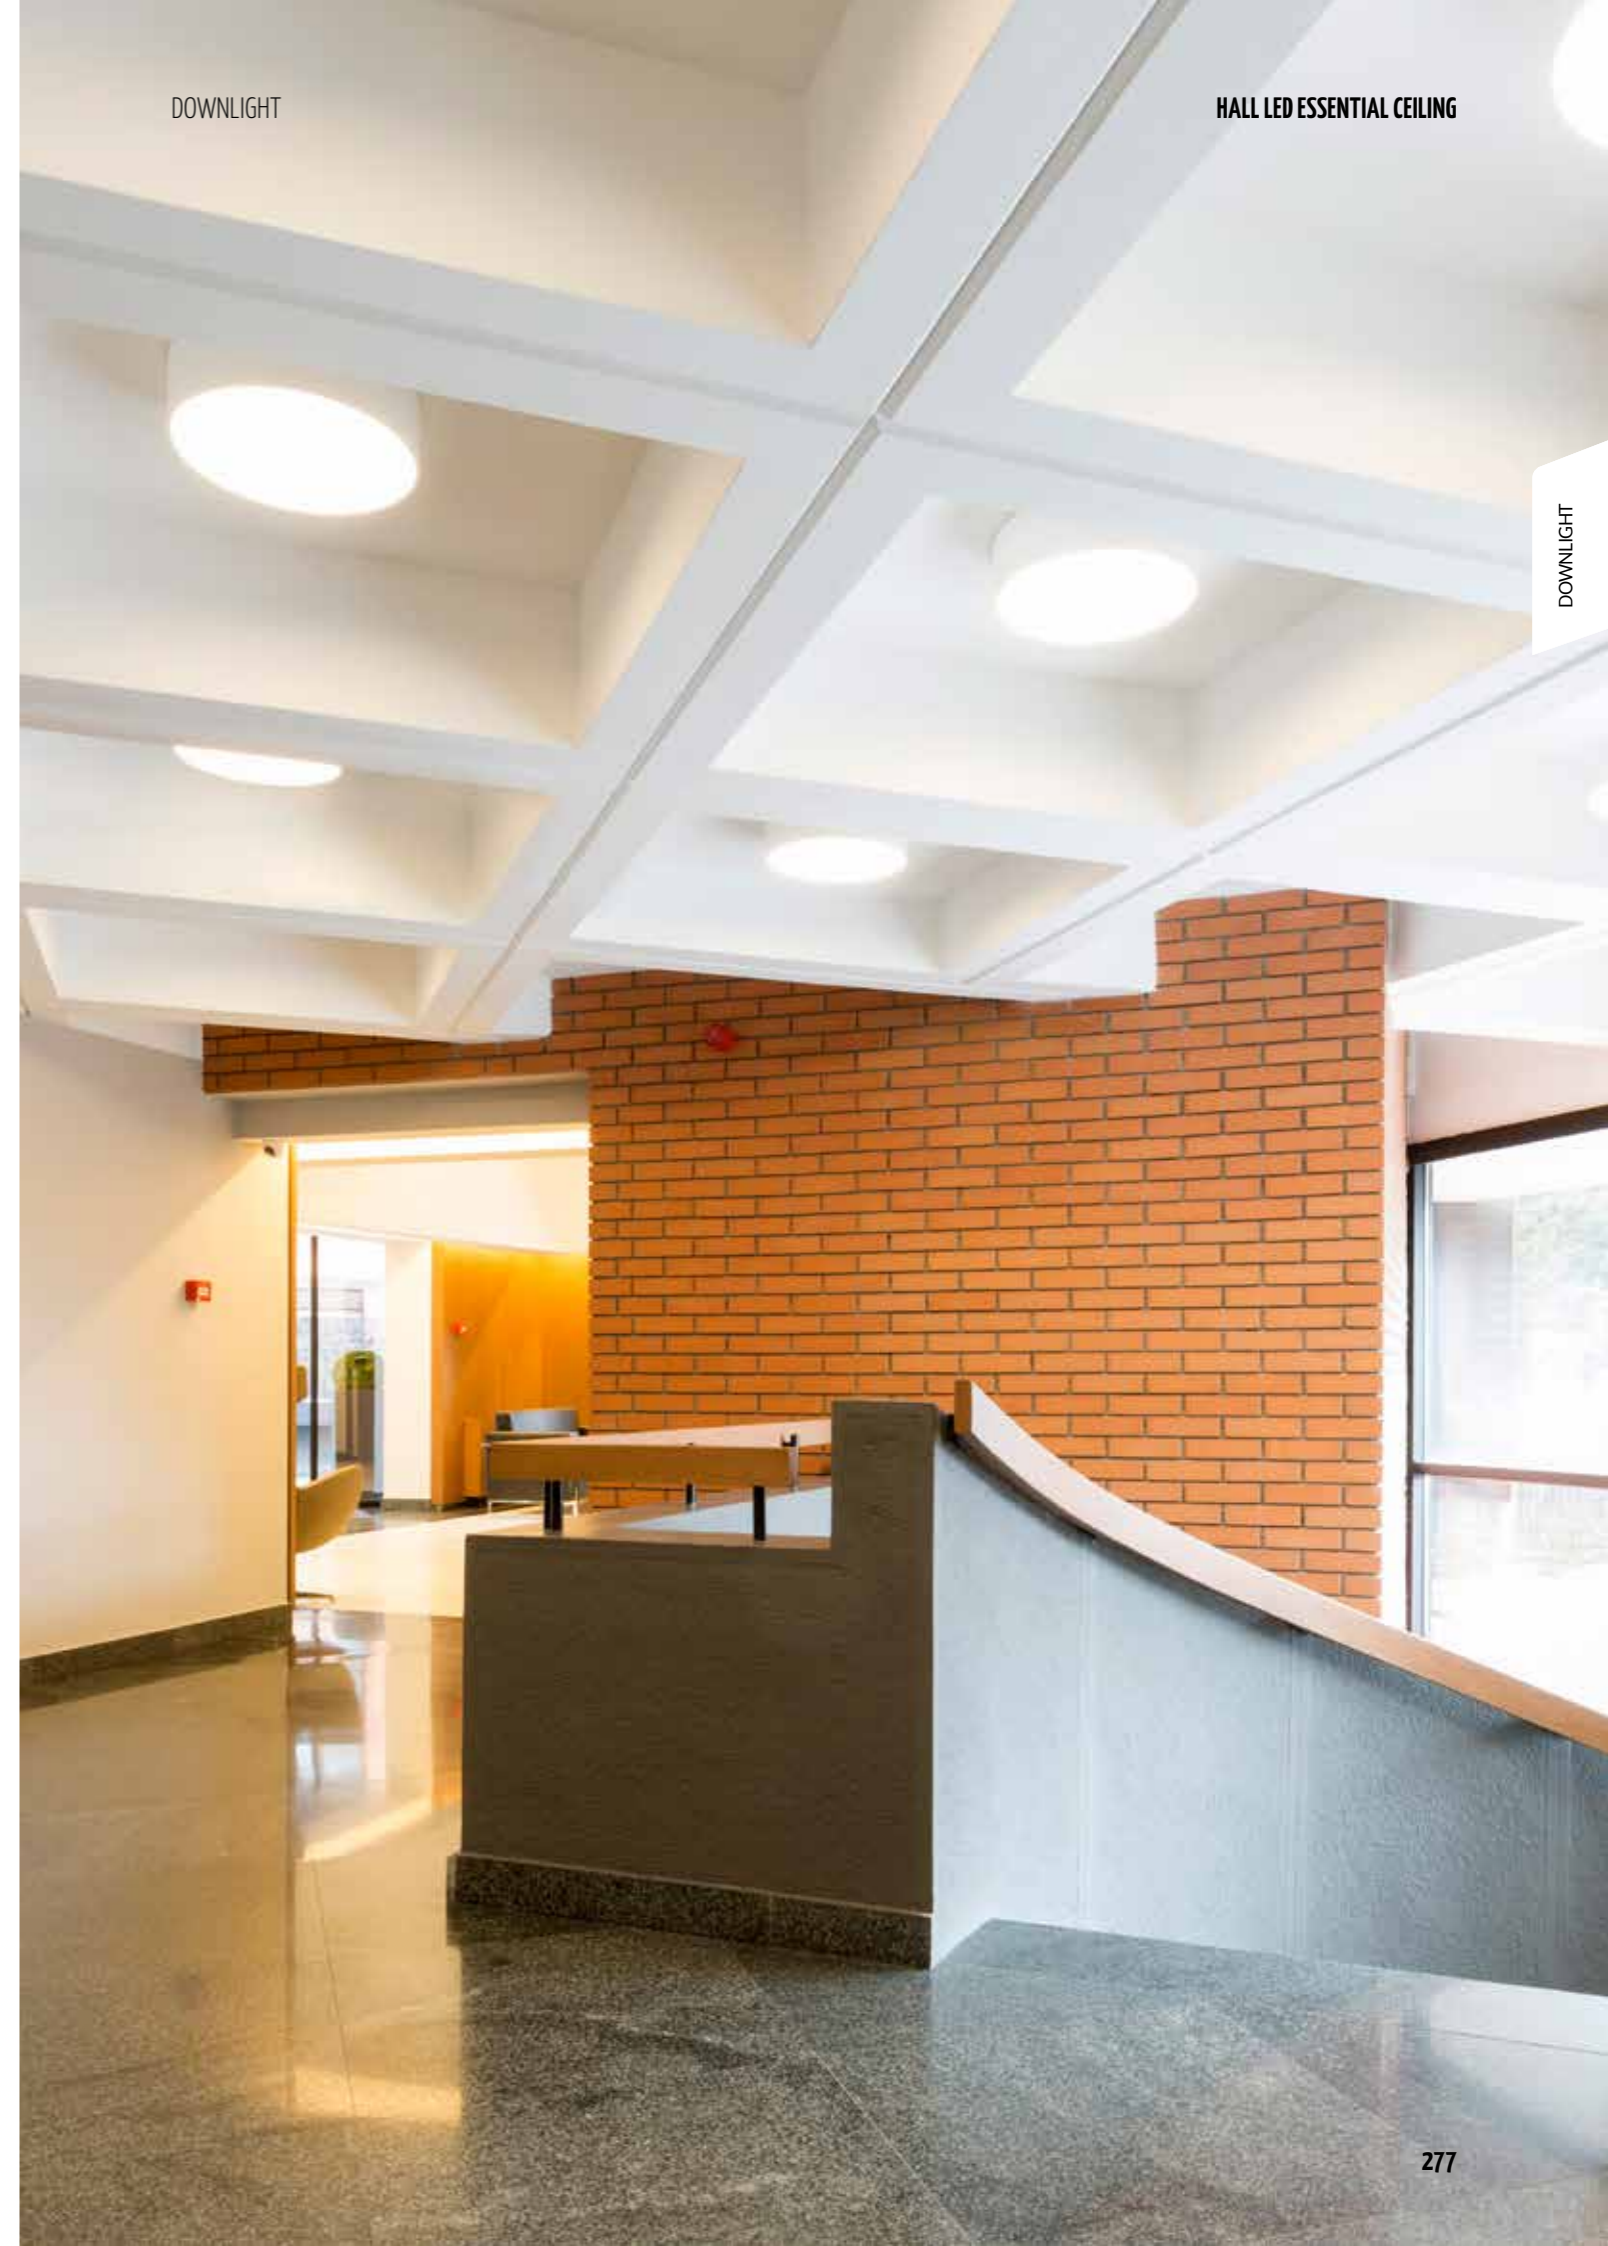


# HALL LED ESSENTIAL CEILING




**OPTIC**

Polycarbonate frosted diffuser  
 90° beam angle.  
 CUT OFF > 10°.

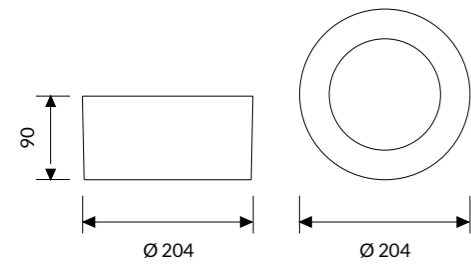

IP 44 A

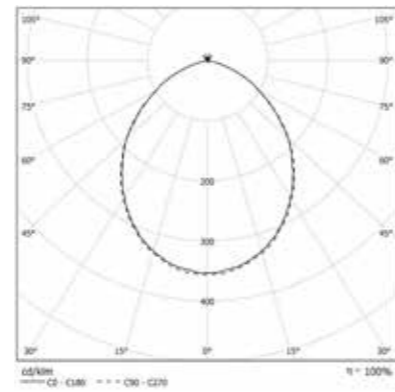

**COLOUR TEMPERATURE**

**4000K**

COD	💡	lm
28PG15L490	15W	1380
28PG21L490	21W	1932

**3000K**

COD	💡	lm
28PG15L390	15W	1242
28PG21L390	21W	1739

## Technical Note

**INSTALLATION**

