


ISI LED IP55




ID CODE: 31

Luminaire created for **sterile environments**, with LED technology, universal fixture for **false ceiling with visible and hidden structure**.

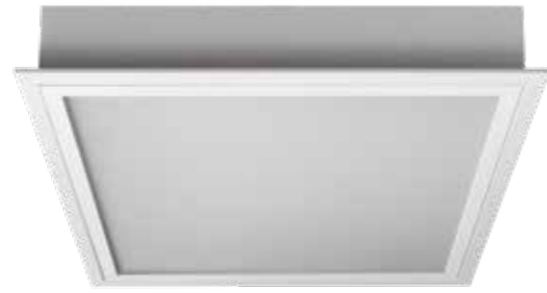







Design
esse-ci

FEATURES

-  Direct Emission
-  UGR <19; <22
-  IP 55






LED

-  3000K/4000K
-  >106 lm/W
-  CRI >90
-  Eye safety: RG0/RG1
-  Mac Adams 3
-  L80/B10 >50.000h

CERTIFICATIONS

-  CE
-  A+
-  5 years warranty

ON REQUEST

-  DALI - RDD code (verify the version)
-  Emergency kit 1/3 hour EM/EM3h code
-  5000K
-  Ceiling version
-  False ceiling structure 625x625mm

Specifications

- Driver included
- Fixed power current driver, normal life time 50,000 h (at ta max. 50 ° Cand ≤ 0.2% failure rate per 1,000 h)
- Quick connector for the connection standard provided

Optic

- DPL technology for controlled UGR with UGR<19
- PG with PMMA diffuser for homogeneous emission, UGR<22

Body

Epoxy-powder coated steel-sheet body.
Aluminum painted white frame.





ISI LED IP55 DPL


OPTIC

DPL technology with UGR<19 composed by a microprismatic internal sheet.

Aluminum white painted frame.

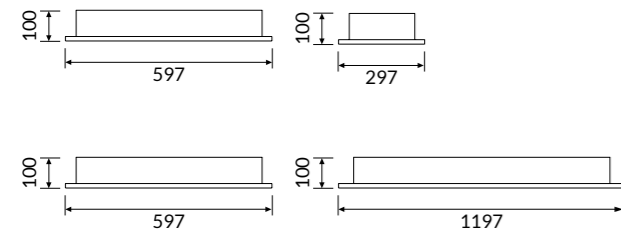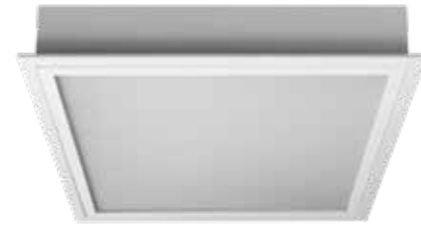

IP 55 A'

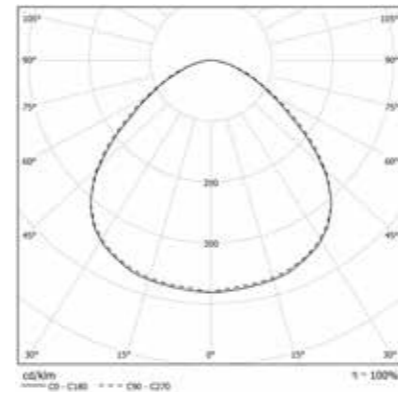

COLOUR TEMPERATURE

4000K

COD	💡	lm	mm
31DPL38L49055	38W	3357	597x597
31DPL64L49055	64W	6547	597x597
31DPL38L49055M3	38W	3357	297x1197
31DPL64L49055M3	64W	6547	297x1197

3000K



COD	💡	lm	mm
31DPL38L39055	38W	3181	597x597
31DPL64L39055	64W	5952	597x597
31DPL38L39055M3	38W	3181	297x1197
31DPL64L39055M3	64W	5952	297x1197

ISI LED IP55 PG


OPTIC

PMMA diffuser for homogeneous emission, UGR<22.

Aluminum white painted frame.

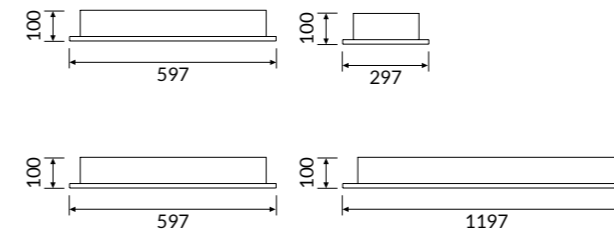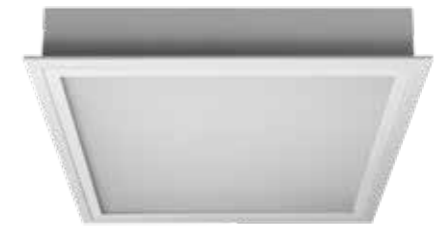

IP 55 A'

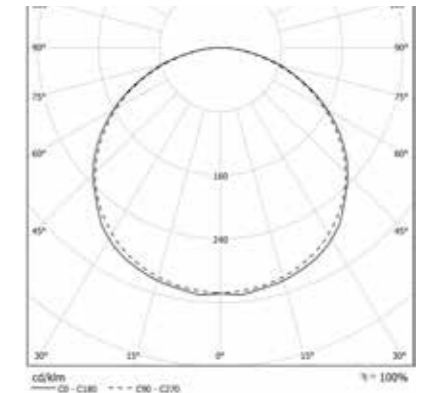

COLOUR TEMPERATURE

4000K

COD	💡	lm	mm
31PG38L49055	38W	3428	597x597
31PG64L49055	64W	6845	597x597
31PG38L49055M3	38W	3428	297x1197
31PG64L49055M3	64W	6845	297x1197

3000K

COD	💡	lm	mm
31PG38L39055	38W	3251	597x597
31PG64L39055	64W	6250	597x597
31PG38L39055M3	38W	3251	297x1197
31PG64L39055M3	64W	6250	297x1197

Accessories



KSFIP65

Kit of fixing brackets for installation on plasterboard, with hidden structure and on slats.