

# JOOLS LV

ID CODE: 11

JOOLS LV is a **powerful compact light** for suspended installation in conjunction with the Esse-ci 48V LV track system. Complete with bi-directional light emission it is designed for professional applications, such as boutique retail.

See also:

JOOLS suspended/ceiling

p. 148




LV TRACK

p. 354









Design  
Serge & Robert Cornelissen

## FEATURES

-  Direct/Indirect Emission
-  UGR <19
-  IP 40



## LED

-  3000K/4000K
-  >99 lm/W
-  CRI >90
-  Eye safety: RG0/RG1
-  Mac Adams 3
-  L80/B10 >50.000h

## CERTIFICATIONS

-  CE
-  A+
-  5 years warranty

## ON REQUEST

-  DALI - RDD code (verify the version)
-  2700K - 5000K

**Specifications** LED CoB technology.

**Optic** · Diffused satin PC for indirect emission.  
· Direct emission with PC lens. CUT-OFF>30°

**Body** Spun aluminum with epoxy powder coating.

**Colour** ○ White RAL 9003 wrinkled - Code: W  
● Black RAL 9005 wrinkled - Code: BK  
● Champagne Anodized - Code: C67




# JOOLS LV


## OPTIC

Diffused satin PC for indirect emission.  
 Direct emission with PC lens. CUT-OFF > 30°  
 Beam angle: 14° - 35° - 55°.

Needs box-power: see accessories on p.339.



IP 40 A+

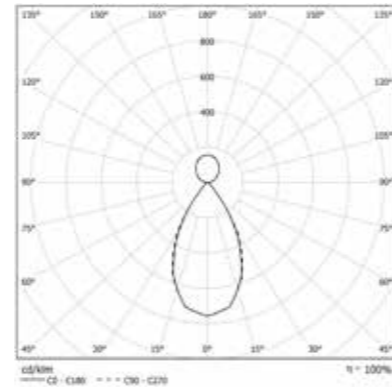

## DIRECT // INDIRECT EMISSION

Ø (mm)	Power Direct Mod.	Power Indirect Mod.
150	12W	7W
200	14W	8W
250	17W	10W

## COLOUR TEMPERATURE

4000K

COD	💡	lm	Ø (mm)
11DI19L49014	19W 14°	1881	150
11DI19L49035	19W 35°	1881	150
11DI19L49055	19W 55°	1881	150
11DI22L49014	22W 14°	2106	200
11DI22L49035	22W 35°	2106	200
11DI22L49055	22W 55°	2106	200
11DI27L49014	27W 14°	2498	250
11DI27L49035	27W 35°	2498	250
11DI27L49055	27W 55°	2498	250

3000K

COD	💡	lm	Ø (mm)
11DI19L39014	19W 14°	1768	150
11DI19L39035	19W 35°	1768	150
11DI19L39055	19W 55°	1768	150
11DI22L39014	22W 14°	1980	200
11DI22L39035	22W 35°	1980	200
11DI22L39055	22W 55°	1980	200
11DI27L39014	27W 14°	2349	250
11DI27L39035	27W 35°	2349	250
11DI27L39055	27W 55°	2349	250



## Accessories



**11AA16LV**  
 Power/suspension for Low Voltage 48V track.



**11AA16LVD**  
 Power/suspension for Low Voltage 48V track, DALI version.

## Technical Note

### EXAMPLE OF INSTALLATION ON RECESSED LV TRACK

