

JOOLS

ID CODE: 11

JOOLS is a decorative pendant with an organic shape, **compact yet powerful in flux**, with bi-directional emission for professional applications such as **retail and hospitality**.

The highly decorative character is ideal for suspending over reception desks as an accent light, without sacrificing **indirect lighting throughout the environment**. Thanks to the accessories it can be installed as a suspended fitting, directly mounted to the ceiling, hung from LV track or even wall mounted.

See also:




JOOLS LV p. 336

JOOLS WALL p. 380









Design
Serge & Robert Cornelissen

FEATURES

-  Direct/Indirect Emission
-  UGR <19
-  IP 40


LED

-  3000K/4000K
-  >99 lm/W
-  CRI >90
-  Eye safety: RG0/RG1
-  Mac Adams 3
-  L80/B10 >50.000h

CERTIFICATIONS

-  CE
-  A+
-  5 years warranty

ON REQUEST




-  DALI - RDD code (verify the version)
-  2700K - 5000K

Specifications LED CoB technology.

Optic Diffused satin PC for indirect emission.
Direct emission with PC lens. CUT-OFF>30°.

Body Spun aluminum with epoxy powder coating.

Colour

-  White RAL 9003 - Code: W
-  Black RAL 9005 - Code: BK
-  Champagne Anodized - Code: C67

SUSPENDED - CEILING

JOOLS

SUSPENDED
/CEILING




JOOLS

OPTIC

Diffused satin PC for indirect emission.
Direct emission with PC lens. CUT-OFF > 30°
Beam angle: 14° - 35° - 55°.

Power/suspension cable included.
Needs powered box: see accessories on p. 152

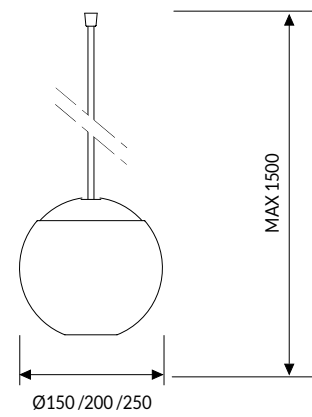

DIRECT // INDIRECT EMISSION

Ø (mm)	Power Direct Mod.	Power Indirect Mod.
150	12W	7W
200	14W	8W
250	17W	10W

COLOUR TEMPERATURE


4000K

COD	Light Bulb Icon	lm	Ø (mm)
11DI19L49014	19W 14°	1881	150
11DI19L49035	19W 35°	1881	150
11DI19L49055	19W 55°	1881	150
11DI22L49014	22W 14°	2106	200
11DI22L49035	22W 35°	2106	200
11DI22L49055	22W 55°	2106	200
11DI27L49014	27W 14°	2498	250
11DI27L49035	27W 35°	2498	250
11DI27L49055	27W 55°	2498	250

JOOLS CEILING

OPTIC

Diffused satin PC for indirect emission.
Direct emission with PC lens. CUT-OFF > 30°
Beam angle: 14° - 35° - 55°.



DIRECT // INDIRECT EMISSION


Ø (mm)	Power Direct Mod.	Power Indirect Mod.
150	12W	7W
200	14W	8W
250	17W	10W

COLOUR TEMPERATURE


4000K

COD	Light Bulb Icon	lm	Ø (mm)
11DI19L49014C	19W 14°	1881	150
11DI19L49035C	19W 35°	1881	150
11DI19L49055C	19W 55°	1881	150
11DI22L49014C	22W 14°	2106	200
11DI22L49035C	22W 35°	2106	200
11DI22L49055C	22W 55°	2106	200
11DI27L49014C	27W 14°	2498	250
11DI27L49035C	27W 35°	2498	250
11DI27L49055C	27W 55°	2498	250

IP 40 A'

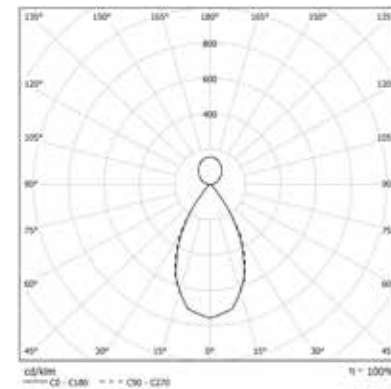

IP 40 A'

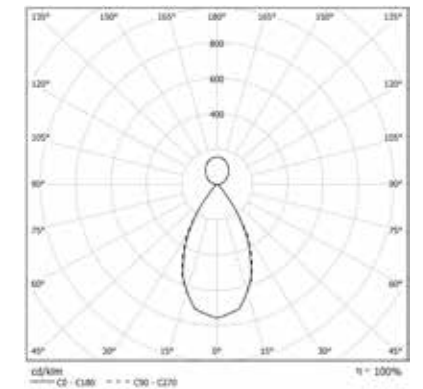



11AA16
Box-power for single ceiling installation.



11AA16RDD
Box-power for single ceiling installation, DALI version.



11AA16R
Box-power for recessed installation.



11AA16RRDD
Box-power for recessed installation, DALI version.



11AA16IL
Box-power for start continuous rows.



11AA16ILRDD
Box-power for start continuous rows, DALI version.



11AA16CL
Box-power for centre continuous rows.



11AA16CLRDD
Box-power for centre continuous rows, DALI version.




11AA16FL
Box-power for end continuous rows.




11AA16FLRDD
Box-power for end continuous rows, DALI version.

CEILING

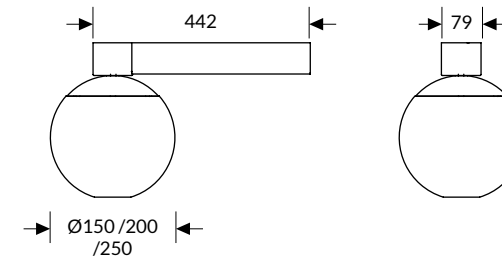

SUSPENDED

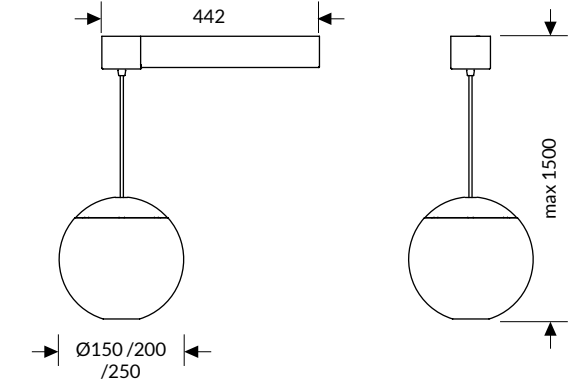

ENDLESS CONFIGURATION POSSIBILITIES

