

KLIP

ID CODE: 64




Modern source for a new way of lighting objects in the name of quality, efficiency and discretion.

Precise, uniform accent lighting with excellent colour performance: ideal for the retail, historical and hospitality environments or museums.









Design
esse-ci

FEATURES

-  Direct Emission
-  UGR <19
-  IP 40





LED

-  3000K/4000K
-  >96 lm/W
-  CRI >90
-  Eye safety: RG0/RG1
-  Mac Adams 3
-  L80/B10 >50.000h

CERTIFICATIONS

-  CE
-  A+
-  5 years warranty

ON REQUEST

-  DALI - RDD code (verify the version)
-  Emergency kit 1/3 hour EM/EM.3h code
-  2700K - 5000K
-  Reflectors 10° - 40°

Specifications · Built-in driver
· LED CoB technology

Optic Internal aluminium reflectors from 20° - 50° beam angles. Frosted Glass.

Body Manufactured from pressure die-cast aluminum.


Colours ○ White RAL 9003 wrinkled - Code: W
● Black RAL 9005 wrinkled - Code: BK




KLIP

OPTIC

Internal aluminum reflectors:
20°- 50° beam angles.

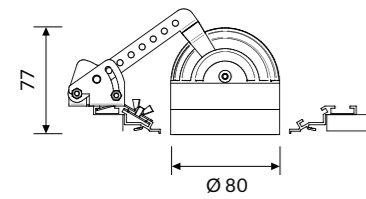

IP 40 A++

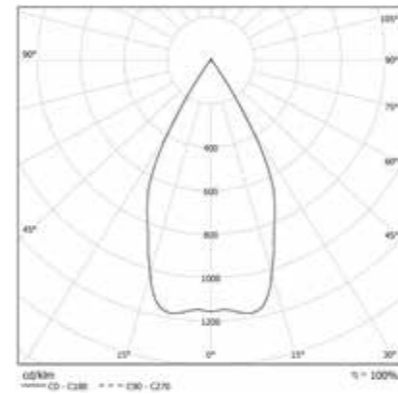

COLOUR TEMPERATURE

4000K

| COD | Light Bulb Icon | lm |
|--------------|-----------------|------|
| 64VT9L49020 | 9W 20° | 866 |
| 64VT9L49050 | 9W 50° | 866 |
| 64VT13L49020 | 13W 20° | 1072 |
| 64VT13L49050 | 13W 50° | 1072 |
| 64VT18L49020 | 18W 20° | 1485 |
| 64VT18L49050 | 18W 50° | 1485 |
| 64VT26L49020 | 26W 20° | 2503 |
| 64VT26L49050 | 26W 50° | 2503 |

3000K

| COD | Light Bulb Icon | lm |
|--------------|-----------------|------|
| 64VT9L39020 | 9W 20° | 831 |
| 64VT9L39050 | 9W 50° | 831 |
| 64VT13L39020 | 13W 20° | 1020 |
| 64VT13L39050 | 13W 50° | 1020 |
| 64VT18L39020 | 18W 20° | 1413 |
| 64VT18L39050 | 18W 50° | 1413 |
| 64VT26L39020 | 26W 20° | 2400 |
| 64VT26L39050 | 26W 50° | 2400 |

KLIP SIDE PROFILES


Side aluminum profiles for recessed installation in continuous line. Each item code consists of n°2 aluminum profiles, connection plates and spacers.



| COD | mm |
|----------|------|
| 64PL1000 | 1000 |
| 64PL2000 | 2000 |
| 64PL3000 | 3000 |


KLIP HEADERS KIT

Headers kit for recessed continuous line.



COD

64AAPIL

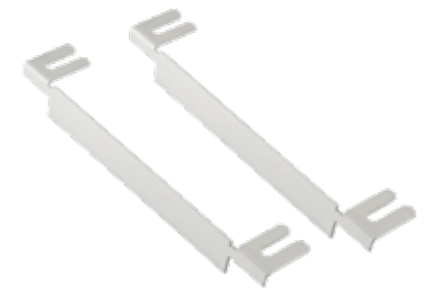

Accessories



64MC1000: 1000mm
64MC2000: 2000mm
Dark housing for false ceiling.

OPTICS



64AAMG
Frosted Glass.

Technical Note

BODY ROTATION AND INSTALLATION

