

# LINEA IP54


ID CODE: 12

IP54 fixtures that combine **efficiency and energy saving** with a long life time. Ideal for laboratories, walking areas and industrial environments.









Design  
esse-ci

## FEATURES

-  Direct Emission
-  UGR < 22
-  IP 54
-  IK 10
-  -25° / +35°




## LED

-  3000K/4000K
-  >98 lm/W; >103 lm/W
-  CRI >90
-  Eye safety: RG0/RG1
-  Mac Adams 3
-  L80/B10 >50.000h

## CERTIFICATIONS

-  CE
-  A+
-  5 years warranty


## ON REQUEST

-  DALI - RDD code (verify the version)
-  Emergency kit 1/3 hour EM/EM.3h code
-  5000K - 6500K

**Specifications** Built-in driver.

**Optic** Polycarbonate diffuser, impact-resistant.


**Body** Polycarbonate body with high mechanical resistance, polyurethane foam seal (PUR).

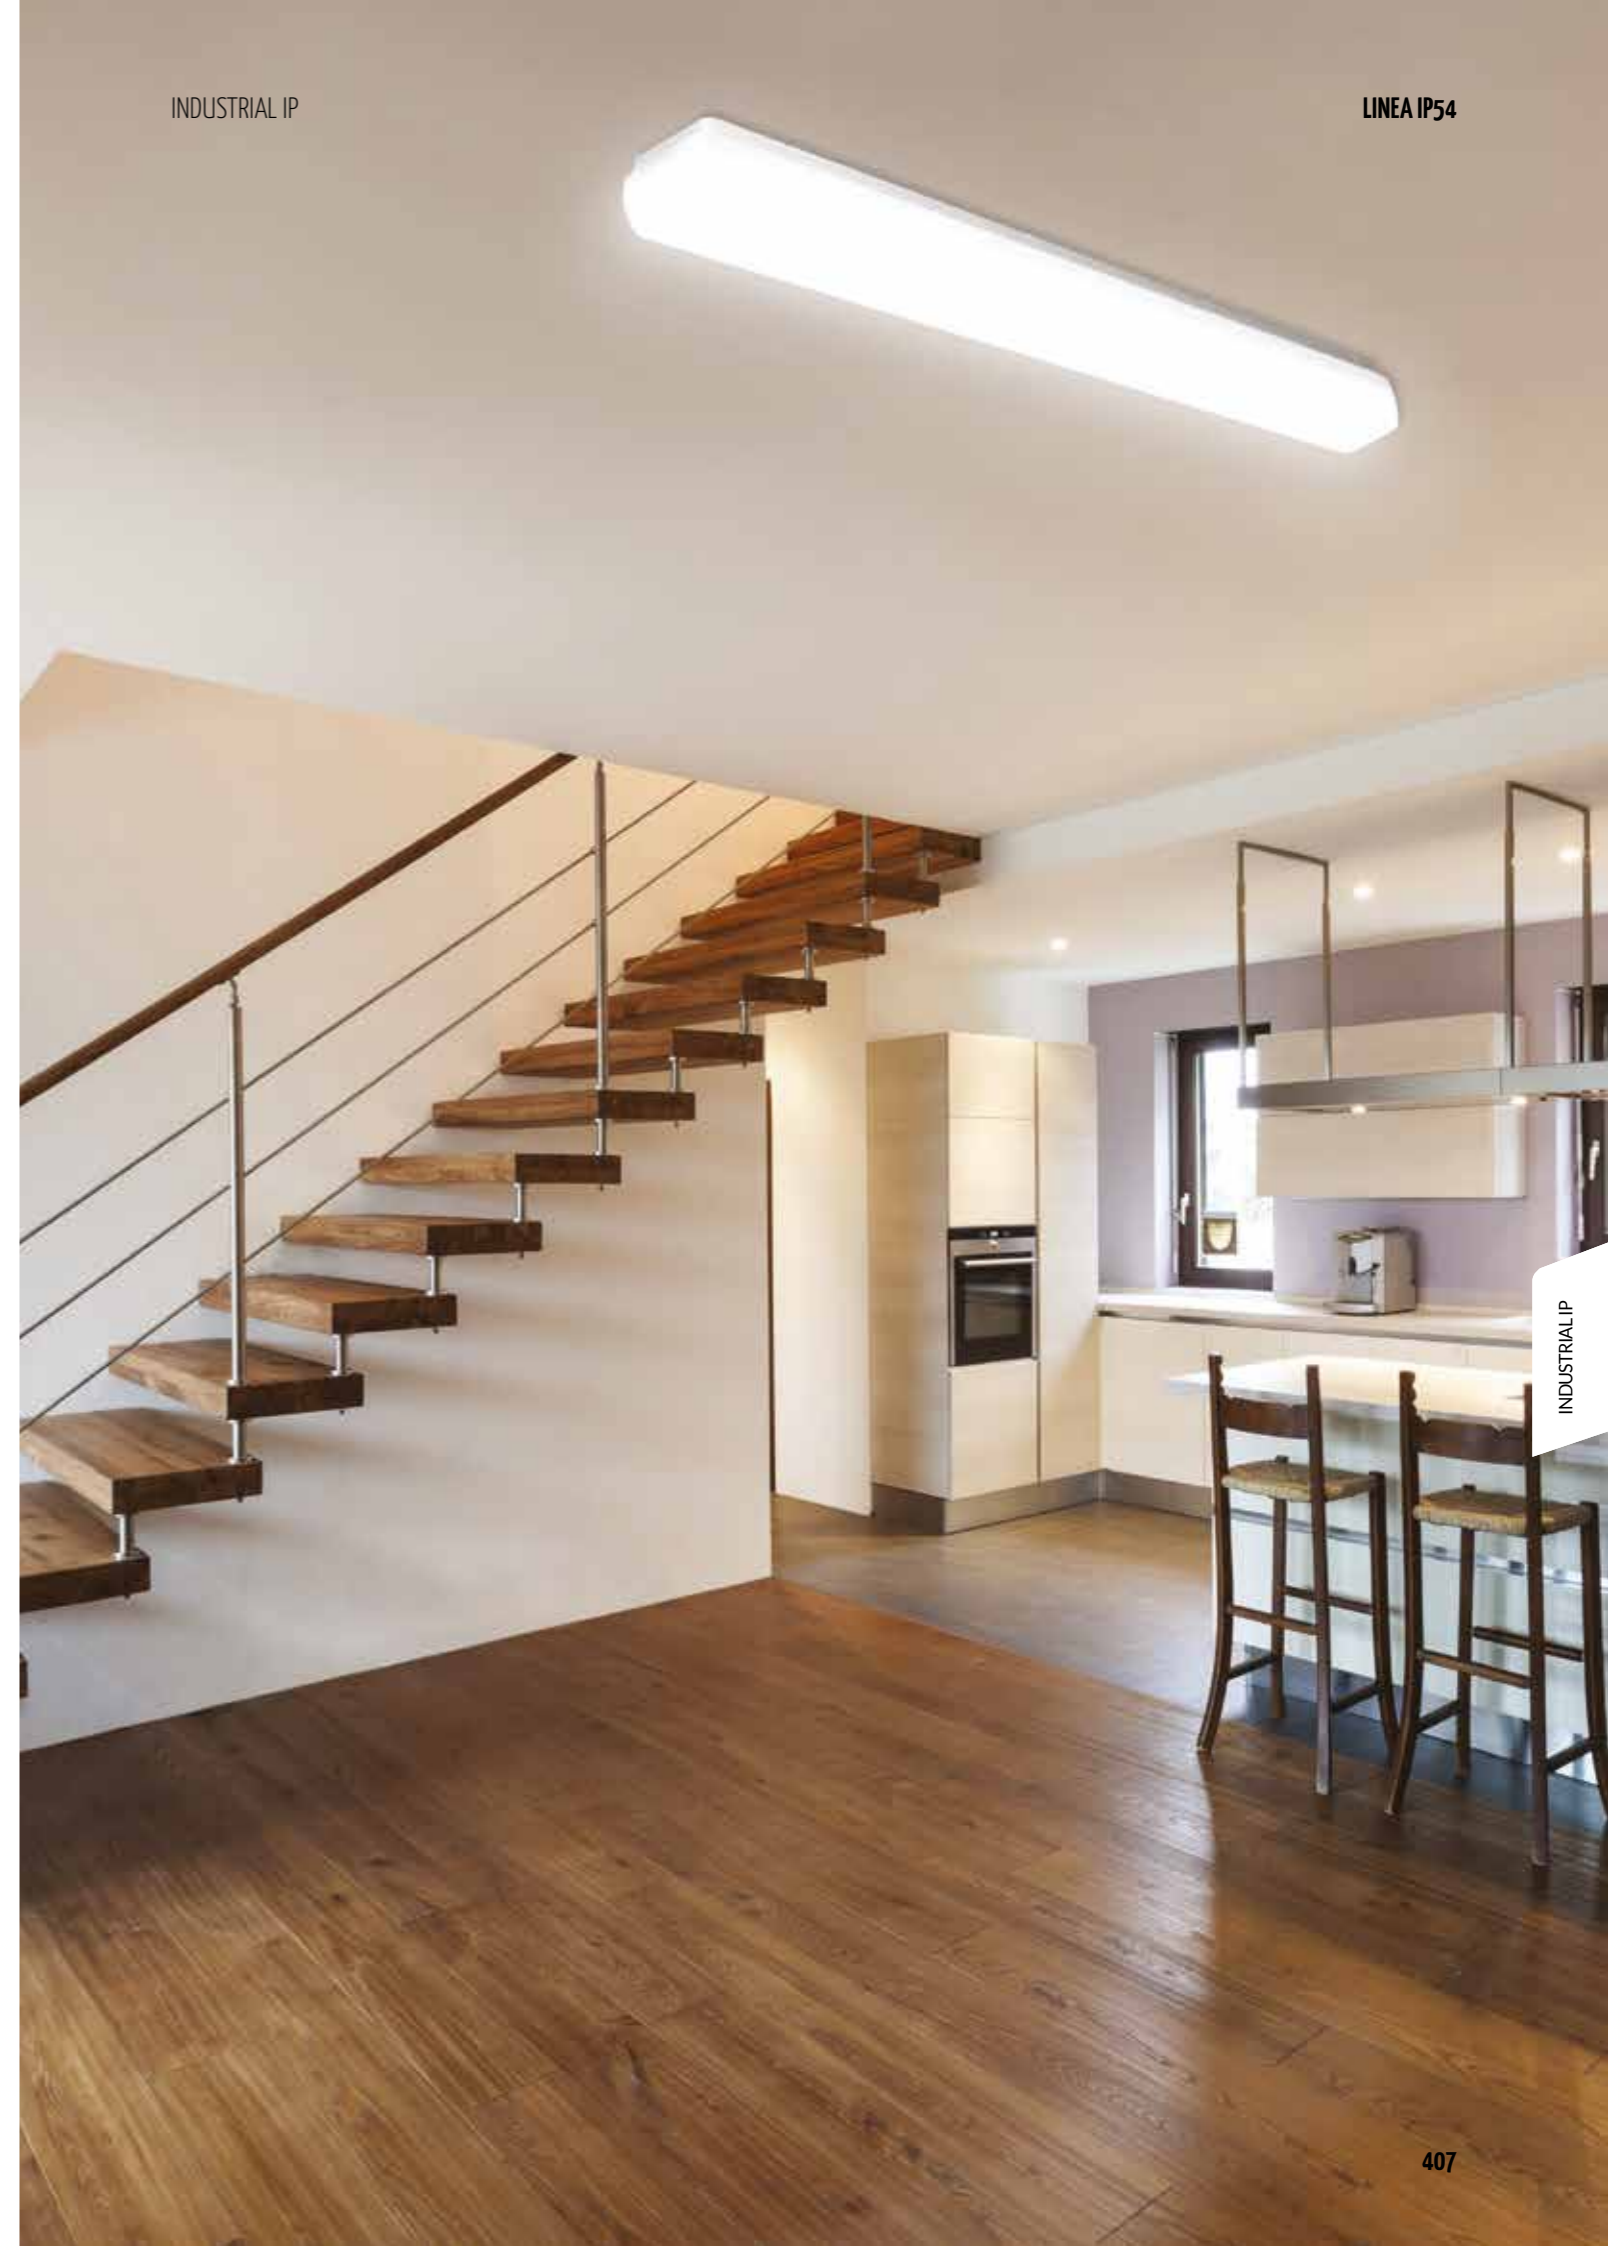


### LINEA IP54 LONG

**OPTIC**

Polycarbonate diffuser, impact-resistant.

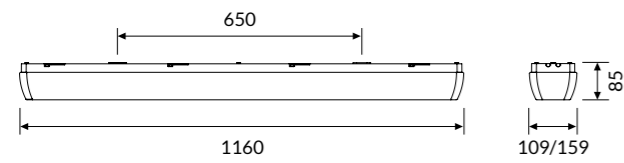

IP 54 A+  
IK10

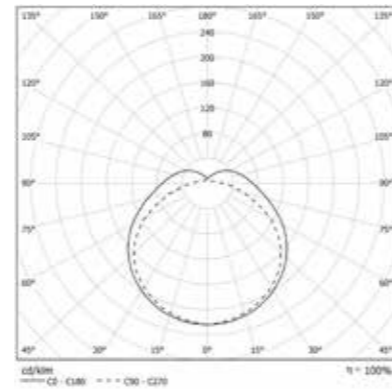

**COLOUR TEMPERATURE**

**4000K**

COD	💡	lm	mm
12PO21L49054	21W	2130	109x1160
12PO25L49054	25W	2716	109x1160
12PO33L49054	33W	3506	109x1160
12PO39L49054	39W	3971	159x1160
12PO48L49054	48W	4948	159x1160
12PO65L49054	65W	6705	159x1160


**3000K**

COD	💡	lm	mm
12PO21L39054	21W	1894	109x1160
12PO25L39054	25W	2255	109x1160
12PO33L39054	33W	2977	109x1160
12PO39L39054	39W	3518	159x1160
12PO48L39054	48W	4330	159x1160
12PO65L39054	65W	5864	159x1160


### LINEA IP54 SQUARE

**OPTIC**

Polycarbonate diffuser, impact-resistant.

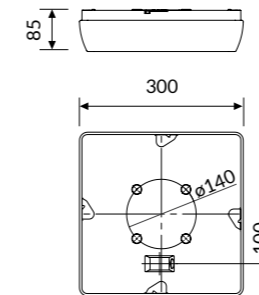

IP 54 A+  
IK10

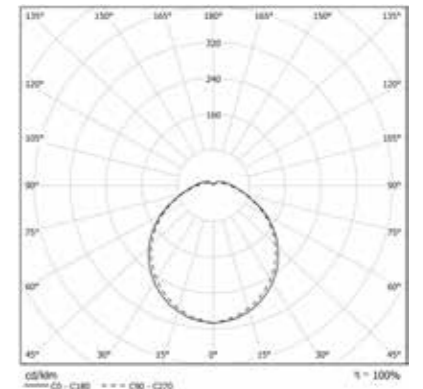

**COLOUR TEMPERATURE**

**4000K**

COD	💡	lm	mm
12PO10L49054	10W	1097	300x300
12PO13L49054	13W	1386	300x300
12PO18L49054	18W	1879	300x300
12PO27L49054	27W	2688	300x300


**3000K**

COD	💡	lm	mm
12PO10L39054	10W	893	300x300
12PO13L39054	13W	1161	300x300
12PO18L39054	18W	1607	300x300
12PO27L39054	27W	2411	300x300


### LINEA IP54 ROUND

**OPTIC**

Polycarbonate diffuser, impact-resistant.

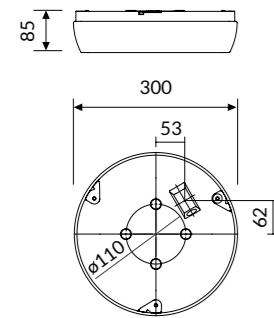

IP 54 A+  
IK10

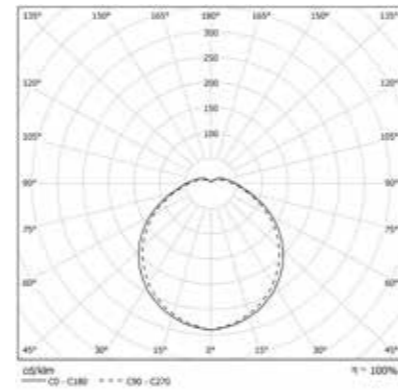

**COLOUR TEMPERATURE** **4000K**

COD	💡	lm	Ø (mm)
12PO10L49054R	10W	1116	300
12PO13L49054R	13W	1395	300
12PO18L49054R	18W	1897	300
12PO27L49054R	27W	2725	300


**COLOUR TEMPERATURE** **3000K**

COD	💡	lm	Ø (mm)
12PO10L39054R	10W	911	300
12PO13L39054R	13W	1185	300
12PO18L39054R	18W	1641	300
12PO27L39054R	27W	2461	300


### LINEA IP54 ROUND INTELLIGENT

**OPTIC**

Polycarbonate diffuser, impact-resistant.  
Integrated presence sensor.

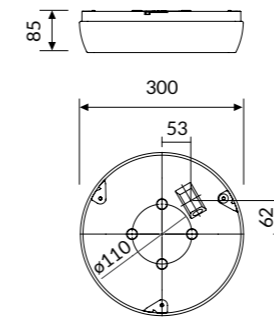

IP 54 A+  
IK10

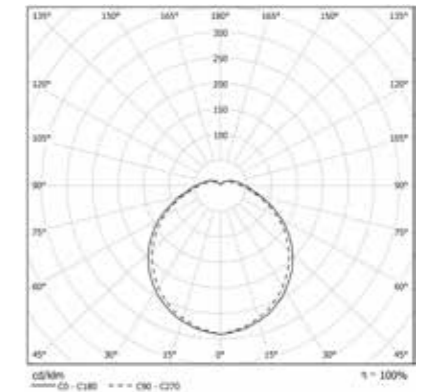

**COLOUR TEMPERATURE** **4000K**


COD	💡	lm	Ø (mm)
12PO10L49054RS	10W	1116	300
12PO13L49054RS	13W	1395	300

**3000K**

COD	💡	lm	Ø (mm)
12PO10L39054RS	10W	911	300
12PO13L39054RS	13W	1185	300

### Technical Note

**PRESENCE SENSOR - CONSTANT LIGHT**



With sufficient natural light, the light will not switch on even if a presence is detected. Manually adjustable light level.



With insufficient natural light, the sensor will switch on the light when a presence is detected.



The light switch off automatically when no movement is detected. Manually adjustable hold time.