



# LINT EVO HCL



2700K-6500K tunable white version with constant flux for HCL ESSE-CI technologies.  
DALI DT8 Driver.

**OPTIC**

- DPL (Diamond Prism LED) technology with UGR<19
- PG diffuser for even diffused emission with UGR<22

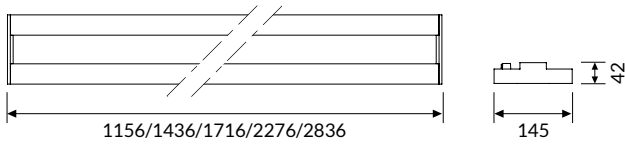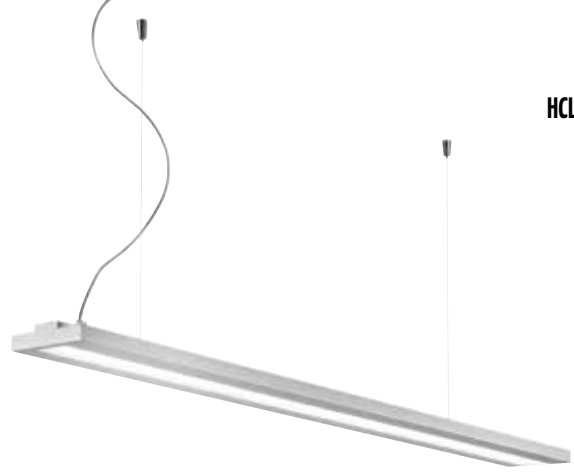

IP 40 **A++**

**VERSIONS**

**DPL**

COD		lm	mm
79DI48DPLHCL	48W	3720	1156
79DI60DPLHCL	60W	4650	1436
79DI72DPLHCL	72W	5580	1716
79DI96DPLHCL	96W	7440	2276
79DI120DPLHCL	120W	9300	2836

**PG**

COD		lm	mm
79DI48PGHCL	48W	3900	1156
79DI60PGHCL	60W	4875	1436
79DI72PGHCL	72W	5850	1716
79DI96PGHCL	96W	7800	2276
79DI120PGHCL	120W	9750	2836