

OTELLO LED




ID CODE: 45

OTELLO returns with a new design and a wide choice of versions to create custom recessed LED luminaires. Simple and fast installation, maximum efficiency, symmetrical and homogeneous light distribution are offered as standard. A choice of beam angles is offered via interchangeable reflectors, and versions with 1, 2 or 3 heads is available, freeing the designer to use the product for both accent and ambient lighting alike. OTELLO LED, perfect for any contemporary application.









Design
esse-ci

FEATURES

-  Direct Emission
-  UGR < 19
-  IP 40





LED

-  3000K/4000K
-  >115 lm/W; >135 lm/W
-  CRI > 90
-  Eye safety: RG0/RG1
-  Mac Adams 3
-  L80/B10 > 50.000h

CERTIFICATIONS

-  CE
-  A+
-  5 years warranty

ON REQUEST

-  DALI - RDD code (verify the version)
-  Bluetooth - BT code (verify the version)
-  Emergency kit 1/3 hour EM/EM 3h code
-  2700K - 5000K
-  Frameless version

Specifications · Built-in driver
· LED CoB technology

Optic · Internal aluminium reflectors from 12° - 20° - 40° - 70° beam angles
· Honeycomb optic. Sculpture optic. Frosted glass

Body Manufactured from folded metal sheet. Spotlights in die-cast aluminum.


Colours ○ White RAL 9003 - Code: B




OTELLO LED 1X

OPTIC

Internal aluminum reflectors:
12°- 20°- 40° - 70° beam angles.

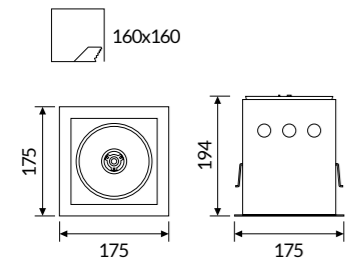

IP 40 A+

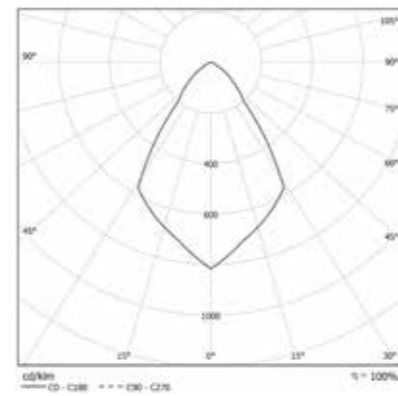

COLOUR TEMPERATURE

4000K

3000K


COD	Light Bulb Icon	lm
45VT118L49012	1x18W 12°	2051
45VT118L49020	1x18W 20°	2051
45VT118L49040	1x18W 40°	2051
45VT118L49070	1x18W 70°	2051
45VT125L49012	1x25W 12°	2790
45VT125L49020	1x25W 20°	2790
45VT125L49040	1x25W 40°	2790
45VT125L49070	1x25W 70°	2790
45VT134L49012	1x34W 12°	4213
45VT134L49020	1x34W 20°	4213
45VT134L49040	1x34W 40°	4213
45VT134L49070	1x34W 70°	4213
45VT138L49012	1x38W 12°	4250
45VT138L49020	1x38W 20°	4250
45VT138L49040	1x38W 40°	4250
45VT138L49070	1x38W 70°	4250

COD	Light Bulb Icon	lm
45VT118L39012	1x18W 12°	1985
45VT118L39020	1x18W 20°	1985
45VT118L39040	1x18W 40°	1985
45VT118L39070	1x18W 70°	1985
45VT125L39012	1x25W 12°	2701
45VT125L39020	1x25W 20°	2701
45VT125L39040	1x25W 40°	2701
45VT125L39070	1x25W 70°	2701
45VT134L39012	1x34W 12°	4077
45VT134L39020	1x34W 20°	4077
45VT134L39040	1x34W 40°	4077
45VT134L39070	1x34W 70°	4077
45VT138L39012	1x38W 12°	4134
45VT138L39020	1x38W 20°	4134
45VT138L39040	1x38W 40°	4134
45VT138L39070	1x38W 70°	4134


OTELLO LED 2X

OPTIC

Internal aluminum reflectors:
12°- 20°- 40° - 70° beam angles.

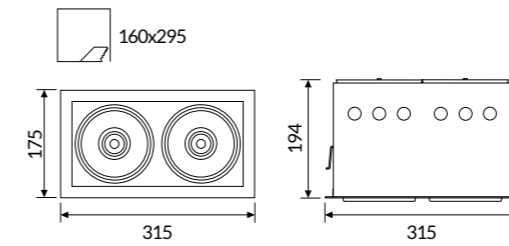

IP 40 A+

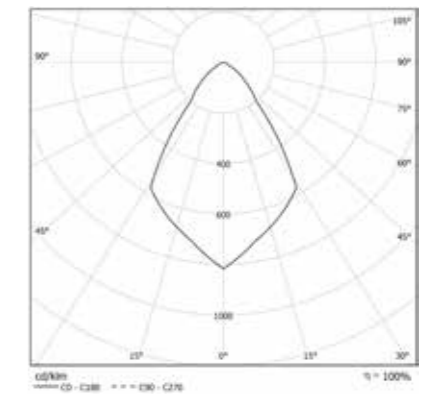

COLOUR TEMPERATURE

4000K

3000K


COD	Light Bulb Icon	lm
45VT218L49012	2x18W 12°	4102
45VT218L49020	2x18W 20°	4102
45VT218L49040	2x18W 40°	4102
45VT218L49070	2x18W 70°	4102
45VT225L49012	2x25W 12°	5580
45VT225L49020	2x25W 20°	5580
45VT225L49040	2x25W 40°	5580
45VT225L49070	2x25W 70°	5580
45VT234L49012	2x34W 12°	8426
45VT234L49020	2x34W 20°	8426
45VT234L49040	2x34W 40°	8426
45VT234L49070	2x34W 70°	8426
45VT238L49012	2x38W 12°	8500
45VT238L49020	2x38W 20°	8500
45VT238L49040	2x38W 40°	8500
45VT238L49070	2x38W 70°	8500

COD	Light Bulb Icon	lm
45VT218L39012	2x18W 12°	3970
45VT218L39020	2x18W 20°	3970
45VT218L39040	2x18W 40°	3970
45VT218L39070	2x18W 70°	3970
45VT225L39012	2x25W 12°	5402
45VT225L39020	2x25W 20°	5402
45VT225L39040	2x25W 40°	5402
45VT225L39070	2x25W 70°	5402
45VT234L39012	2x34W 12°	8154
45VT234L39020	2x34W 20°	8154
45VT234L39040	2x34W 40°	8154
45VT234L39070	2x34W 70°	8154
45VT238L39012	2x38W 12°	8268
45VT238L39020	2x38W 20°	8268
45VT238L39040	2x38W 40°	8268
45VT238L39070	2x38W 70°	8268


OTELLO LED 3X

OPTIC

Internal aluminum reflectors:
12°- 20°- 40° - 70° beam angles.

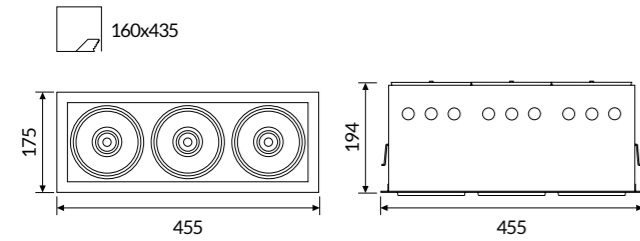

IP 40 A+

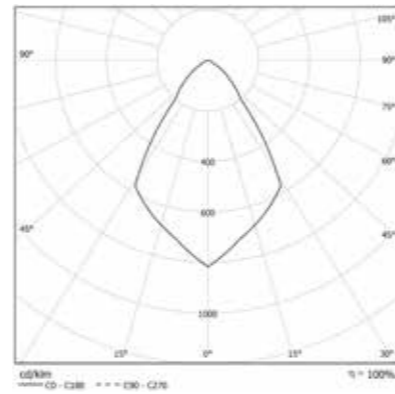

COLOUR TEMPERATURE

4000K

3000K

COD	Light Bulb Icon	lm
45VT318L49012	3x18W 12°	6153
45VT318L49020	3x18W 20°	6153
45VT318L49040	3x18W 40°	6153
45VT318L49070	3x18W 70°	6153
45VT325L49012	3x25W 12°	8370
45VT325L49020	3x25W 20°	8370
45VT325L49040	3x25W 40°	8370
45VT325L49070	3x25W 70°	8370
45VT334L49012	3x34W 12°	12639
45VT334L49020	3x34W 20°	12639
45VT334L49040	3x34W 40°	12639
45VT334L49070	3x34W 70°	12639
45VT338L49012	3x38W 12°	12750
45VT338L49020	3x38W 20°	12750
45VT338L49040	3x38W 40°	12750
45VT338L49070	3x38W 70°	12750

COD	Light Bulb Icon	lm
45VT318L39012	3x18W 12°	5955
45VT318L39020	3x18W 20°	5955
45VT318L39040	3x18W 40°	5955
45VT318L39070	3x18W 70°	5955
45VT325L39012	3x25W 12°	8103
45VT325L39020	3x25W 20°	8103
45VT325L39040	3x25W 40°	8103
45VT325L39070	3x25W 70°	8103
45VT334L39012	3x34W 12°	12231
45VT334L39020	3x34W 20°	12231
45VT334L39040	3x34W 40°	12231
45VT334L39070	3x34W 70°	12231
45VT338L39012	3x38W 12°	12402
45VT338L39020	3x38W 20°	12402
45VT338L39040	3x38W 40°	12402
45VT338L39070	3x38W 70°	12402

Accessories



45AAND
Honeycomb optic.



45AASL
Sculpture optic.



45AAMG
Frosted Glass.

Technical Note

REMOVABLE AND ADJUSTABLE SPOTLIGHTS

Thanks to 1, 2 or 3 light points and the possibility to extract and adjust the spotlights, OTELLO LED guarantees the maximum flexibility to direct the light.

