

# OVVIO DISPLAY LED

ID CODE: 40

**Compact body design** with minimal ceiling bezel and **tight frame (4mm)**, the luminaire can be recessed into false plasterboard ceilings and walls.

Rapid fixing system and fast electrical connection minimizes installation time. High efficiency and high power versions available. Maximum length up to 3 meters with 280mm modularity, with linear joints permitting continuous mounting. Ceiling and ceiling-wall corner modules available.

See also:




OVVIO DISPLAY HCL

p. 484








Design  
Serge & Robert Cornelissen

## FEATURES

-  Direct Emission
-  UGR <22
-  IP 40




## LED

-  3000K/4000K
- >98 lm/W icon" data-bbox="157 558 171 575"/> >98 lm/W
-  CRI >90
-  Eye safety: RG0/RG1
-  Mac Adams 3
-  L80/B10 >50.000h

## CERTIFICATIONS

-  CE
-  A++
-  5 years warranty

## ON REQUEST

-  DALI - RDD code (verify the version)
-  BT Easy connect - BEM/BES code
-  Emergency kit 1/3 hour EM/EM 3h code
-  2700K - 5000K

**Specifications** Built-in driver.

**Optic** PMMA diffuser for a soft emission (UGR<22) with no shadow evident.

**Body** Aluminum extruded body with epoxy powder coating.

**Colour**

- Matt white RAL 9003 - Code: B
- Matt black RAL 9005 - Code: C8




## OVVIO DISPLAY LED LOW POWER

### OPTIC

PMMA diffuser for a soft emission (UGR<22) with no shadow evident.

End caps not included. See accessories on p. 121.

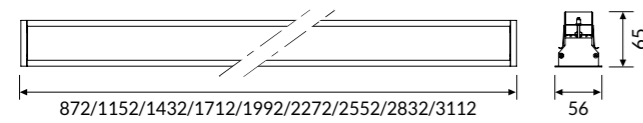


Light Bulb Icon	Light Bulb with G Icon
18W	858 mm
24W	1138 mm
30W	1418 mm
36W	1698 mm
42W	1986 mm

### COLOUR TEMPERATURE 4000K

COD	Light Bulb Icon	lm	mm
40PG18L490	18W	1686	872
40PG24L490	24W	2248	1152
40PG30L490	30W	2810	1432
40PG36L490	36W	3371	1712
40PG42L490	42W	3933	1992
40PG48L490	48W	4496	2272
40PG54L490	54W	5057	2552
40PG60L490	60W	5619	2832
40PG66L490	66W	6181	3112



IP 40 A++

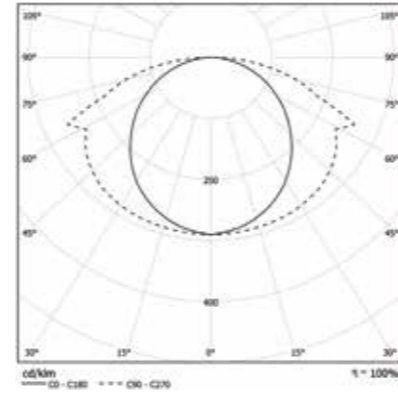

Light Bulb Icon	Light Bulb with G Icon
48W	2266 mm
54W	2546 mm
60W	2826 mm
66W	3106 mm

Both for single installation and continuous rows add 4mm at the cutout for the end cap kit.

### COLOUR TEMPERATURE 3000K


COD	Light Bulb Icon	lm	mm
40PG18L390	18W	1650	872
40PG24L390	24W	2200	1152
40PG30L390	30W	2750	1432
40PG36L390	36W	3300	1712
40PG42L390	42W	3850	1992
40PG48L390	48W	4401	2272
40PG54L390	54W	4950	2552
40PG60L390	60W	5501	2832
40PG66L390	66W	6051	3112

## OVVIO DISPLAY LED HIGH POWER

### OPTIC

PMMA diffuser for a soft emission (UGR<22) with no shadow evident.

End caps not included. See accessories on p. 121.

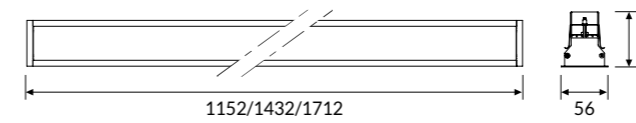

Light Bulb Icon	Light Bulb with G Icon
48W	1138 mm
60W	1418 mm
72W	1698 mm

Both for single installation and continuous rows add 4mm at the cutout for the end cap kit.

### COLOUR TEMPERATURE 4000K

COD	Light Bulb Icon	lm	mm
40PG48L490HP	48W	4494	1152
40PG60L490HP	60W	5619	1432
40PG72L490HP	72W	6743	1712

### 3000K

COD	Light Bulb Icon	lm	mm
40PG48L390HP	48W	4401	1152
40PG60L390HP	60W	5501	1432
40PG72L390HP	72W	6601	1712

## Accessories



40AA09LED

End caps kit.



40AA11LED

Linear joint.



40PG10000

PG metacrilate diffuser (UGR<22), 10m coil to be measured and cut on site to provide continuous gap-free light diffusion.

