

# PCM EVO



ID CODE: 03

IP66 luminaires that combine **efficiency and energy saving** with a long life time. High impact resistance and high protection against dust and water.









Design  
esse-ci

## FEATURES

-  Direct Emission
-  UGR < 22
-  IP 66
-  IK 10
-  -20° / +35°
-  850°





## LED

-  4000K
-  >100 lm/W; >113 lm/W
-  CRI >80
-  Eye safety: RG0/RG1
-  Mac Adams 3
-  L90/B10 > 50.000h

## CERTIFICATIONS

-  CE
-  A+
-  5 years warranty

## ON REQUEST

-  DALI - RDD code (verify the version)
-  Emergency kit 1/3 hour EM/EM3h code
-  3000K-5000K-6500K
-  Steel clips for screen xing

**Specifications** Built-in driver.

**Optic** Translucent polycarbonate screen UV stabilized. Internal reflector in painted steel sheet UV stabilized.


**Body** Polycarbonate body with high mechanical resistance.




# PCM LED EVO PC

## OPTIC

Translucent polycarbonate screen UV stabilized.  
Internal reflector in painted steel sheet UV stabilized.

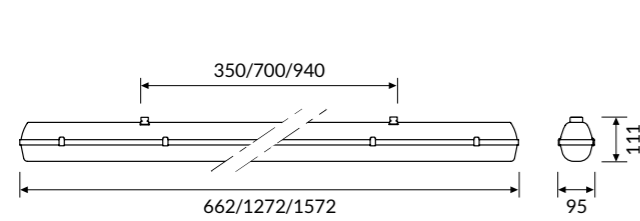

IP 66 A+  
IK10

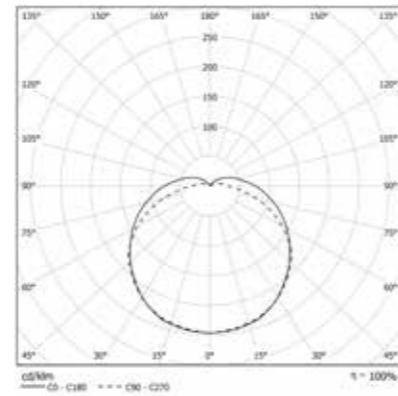

## COLOUR TEMPERATURE


4000K

COD	💡	lm	mm
03PC10L466	10W 4000K IP66	1260	95x662
03PC12L466	12W 4000K IP66	1510	95x662
03PC15L466	15W 4000K IP66	1950	95x662
03PC18L466	18W 4000K IP66	2320	95x1272
03PC22L466	22W 4000K IP66	2860	95x1272
03PC30L466	30W 4000K IP66	3920	95x1272
03PC46L466	46W 4000K IP66	5650	95x1272
03PC22L4L66	22W 4000K IP66	2810	95x1572
03PC27L466	27W 4000K IP66	3530	95x1572
03PC37L466	37W 4000K IP66	4940	95x1572
03PC58L466	58W 4000K IP66	7090	95x1572

# Technical Note

## INDOOR/OUTDOOR INSTALLATION

Not suitable for outdoor applications.  
To be installed in indoor or covered outdoor areas.

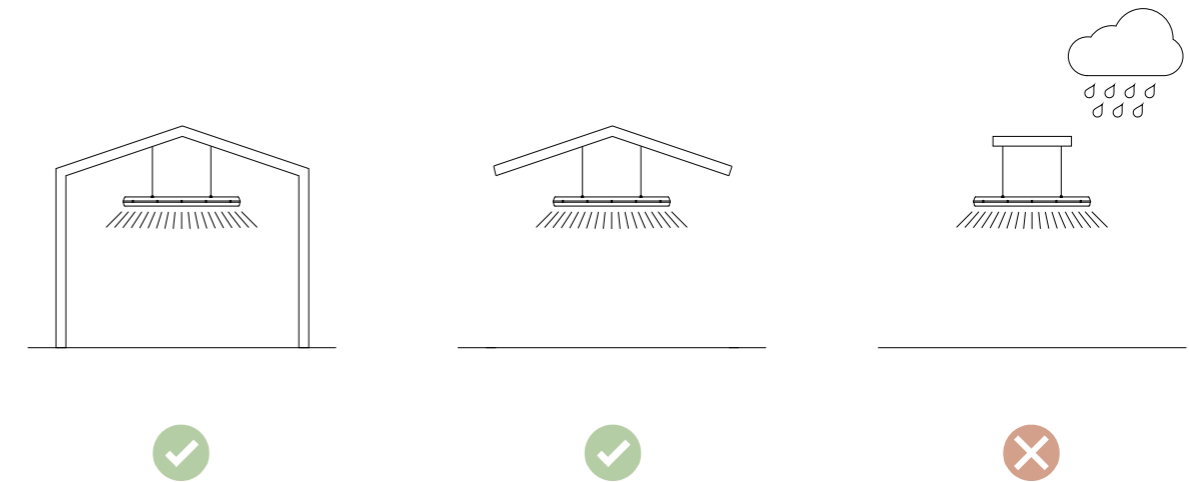

## ACCESSORIES INCLUDED



Brackets for ceiling or wall application.



Hanging hook for suspended applications.