

RGL LED

ID CODE: 04




RGL is the ideal solution for the lighting of coffers or niches, or for back-lighting acrylic sheets. The fixture is made from white epoxy-powder coated sheet steel body and can be installed on any surface.

The use of accessories allows further flexibility for the realization of modular luminous lines. The wiring is facilitated by a quick clamp inside the body.









Design
esse-ci

FEATURES

-  Direct Emission
-  UGR <22
-  IP 40




LED

-  3000K/4000K
-  >95 lm/W
-  CRI >90
-  Eye safety: RG0/RG1
-  Mac Adams 3
-  L80/B10 >50.000h

CERTIFICATIONS

-  CE
-  A+
-  5 years warranty

ON REQUEST

-  DALI - RDD code (verify the version)
-  Emergency kit 1/3 hour EM/EM.3h code
-  2700K - 5000K

Specifications Built-in driver.

Optic PMMA diffuser for homogenous emission UGR<22.

Body White epoxy-powder coated steel-sheet body.





RGL LED PG LOW POWER


OPTIC

PMMA diffuser for homogenous emission.

End caps and ceiling mounting kit included.

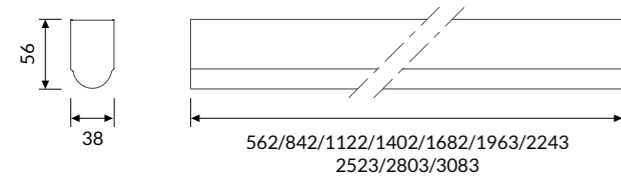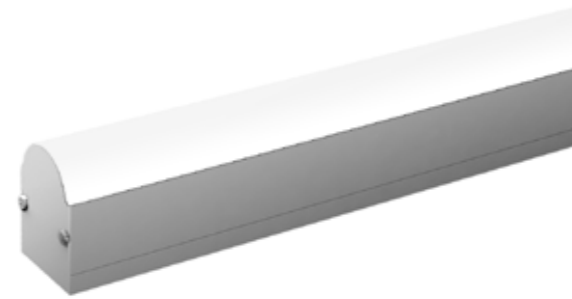

IP 40 A+

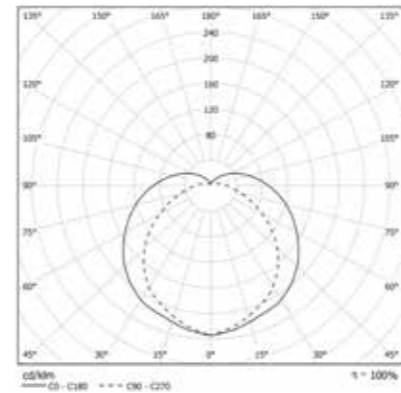

COLOUR TEMPERATURE

4000K

3000K

COD	💡	lm	mm
04PG12L490	12W	1138	562
04PG18L490	18W	1707	842
04PG24L490	24W	2277	1122
04PG30L490	30W	2846	1402
04PG36L490	36W	3415	1682
04PG42L490	42W	3984	1963
04PG48L490	48W	4553	2243
04PG54L490	54W	5122	2523
04PG60L490	60W	5692	2803
04PG66L490	66W	6261	3083



COD	💡	lm	mm
04PG12L390	12W	1083	562
04PG18L390	18W	1624	842
04PG24L390	24W	2165	1122
04PG30L390	30W	2706	1402
04PG36L390	36W	3248	1682
04PG42L390	42W	3789	1963
04PG48L390	48W	4330	2243
04PG54L390	54W	4871	2523
04PG60L390	60W	5413	2803
04PG66L390	66W	5954	3083

RGL LED PG HIGH POWER


OPTIC

PMMA diffuser for homogenous emission.

End caps and ceiling mounting kit included.

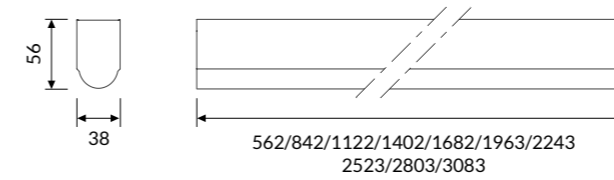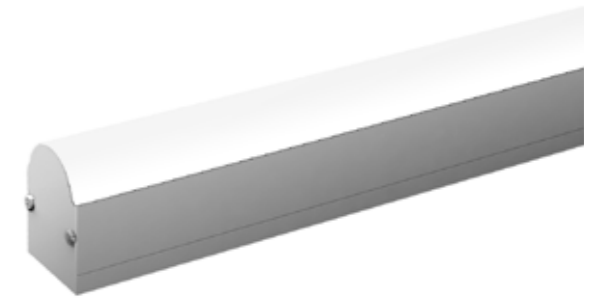

IP 40 A+

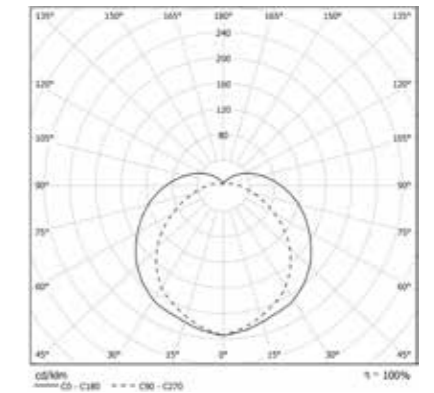

TEMPERATURA COLORE

4000K

3000K

COD	💡	lm	mm
04PG24L490HP	24W	2277	562
04PG36L490HP	36W	3415	842
04PG48L490HP	48W	4553	1122
04PG60L490HP	60W	5692	1402
04PG72L490HP	72W	6830	1682
04PG84L490HP	84W	7968	1963
04PG96L490HP	96W	9106	2243
04PG108L490HP	108W	10245	2523
04PG120L490HP	120W	11383	2803
04PG132L490HP	132W	12522	3083

COD	💡	lm	mm
04PG24L390HP	24W	2165	562
04PG36L390HP	36W	3248	842
04PG48L390HP	48W	4330	1122
04PG60L390HP	60W	5413	1402
04PG72L390HP	72W	6495	1682
04PG84L390HP	84W	7578	1963
04PG96L390HP	96W	8660	2243
04PG108L390HP	108W	9743	2523
04PG120L390HP	120W	10825	2803
04PG132L390HP	132W	11908	3083