

STILLA

ID CODE: 05

STILLA is a **highly technical IP rated fixture** that features performance optics, making it extremely useful for large open plan areas such as **warehousing, transport depots and manufacturing plants**, as well as in **retail applications** that require high brightness artificial lighting with good colour quality. **The body is manufactured from extruded aluminium** for optimum thermal management and sealed against moisture and dust ingress to IP65. Dimmable and emergency options are also offered making the collection perfect for use with lighting control systems, where optimum efficiency and energy savings are desired.








Design
esse-ci

FEATURES

-  Direct Emission
-  UGR <22
-  IP 65
-  IK 08
-  -25° / +45°





LED

-  3000K/4000K
- >119 lm/W icon" data-bbox="142 558 157 578"/> >119 lm/W
-  CRI >90
-  Eye safety: RG0/RG1
-  Mac Adams 3
-  L80/B10 >50.000h

CERTIFICATIONS

-  CE
-  A++
-  5 years warranty

ON REQUEST

-  DALI - RDD code (verify the version)
-  BT Easy connect - BEM/BES code
-  Emergency kit 1/3 hour EM/EM 3h code
-  5000K

Specifications Built-in driver

- Optic**
- NB Narrow beam: concentrating polycarbonate lenses coextruded into the main diffuser
 - WB Wide beam: diffusing polycarbonate lenses coextruded into the main diffuser
 - WO Wide beam opal lens: diffusing polycarbonate lenses coextruded into the main diffuser
 - WA Wide beam acrylic lens: diffusing polycarbonate lenses coextruded into the main diffuser
 - Optional: transparent protection glass

Body Anodized aluminum body and die-cast end caps.

Colour ○ Natural anodized




STILLA NB LOW POWER


OPTIC

Narrow beam optic co-extruded into the main diffuser.

Fixture for single installation equipped with cable L 2mt.

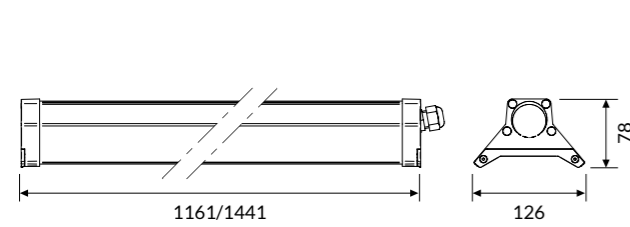

IP 65 A++
IK 08

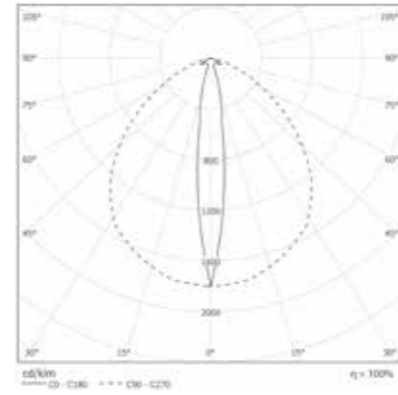

COLOUR TEMPERATURE 4000K

COD	💡	lm	mm
05NB24L49065	24W	2295	1161
05NB30L49065	30W	2870	1441

COLOUR TEMPERATURE 3000K


COD	💡	lm	mm
05NB24L39065	24W	2247	1161
05NB30L39065	30W	2808	1441

STILLA NB-FC LOW POWER


OPTIC

Narrow beam optic co-extruded into the main diffuser.

Fixture for continuous-row with quick connector and through wiring.

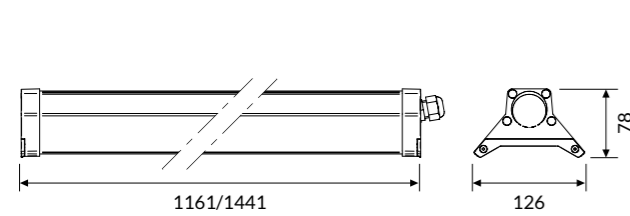

IP 65 A++
IK 08

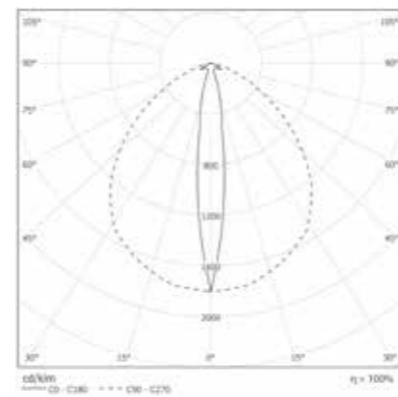

COLOUR TEMPERATURE 4000K

COD	💡	lm	mm
05NB24L49065FC	24W	2295	1161
05NB30L49065FC	30W	2870	1441

COLOUR TEMPERATURE 3000K


COD	💡	lm	mm
05NB24L39065FC	24W	2247	1161
05NB30L39065FC	30W	2808	1441

STILLA WB LOW POWER


OPTIC

Wide beam optic co-extruded into the main diffuser.

Fixture for single installation equipped with cable L 2mt.

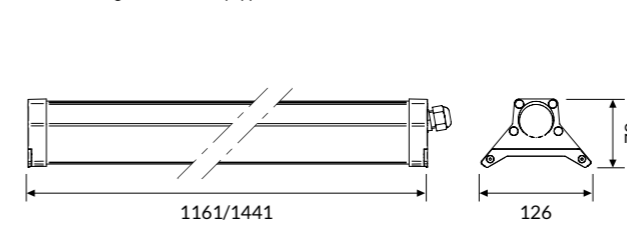

IP 65 A++
IK 08

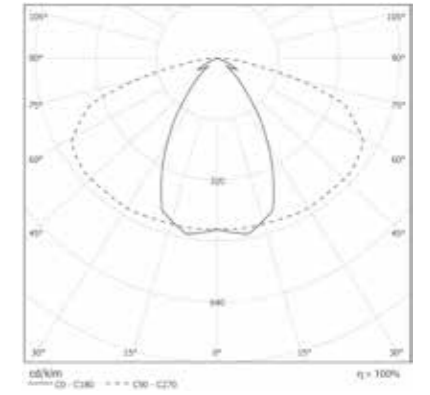

COLOUR TEMPERATURE 4000K

COD	💡	lm	mm
05WB24L49065	24W	2449	1161
05WB30L49065	30W	3061	1441

COLOUR TEMPERATURE 3000K


COD	💡	lm	mm
05WB24L39065	24W	2399	1161
05WB30L39065	30W	3000	1441

STILLA WB-FC LOW POWER


OPTIC

Wide beam optic co-extruded into the main diffuser.

Fixture for continuous-row with quick connector and through wiring.

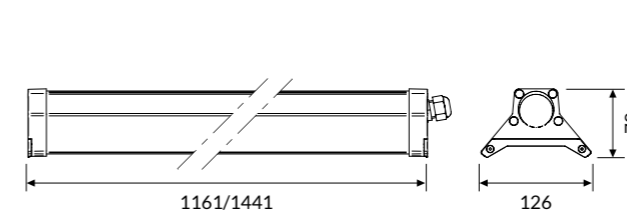

IP 65 A++
IK 08

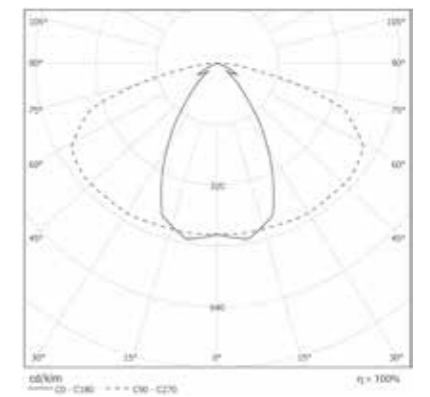

COLOUR TEMPERATURE 4000K

COD	💡	lm	mm
05WB24L49065FC	24W	2449	1161
05WB30L49065FC	30W	3061	1441

COLOUR TEMPERATURE 3000K


COD	💡	lm	mm
05WB24L39065FC	24W	2399	1161
05WB30L39065FC	30W	3000	1441

STILLA WO LOW POWER


OPTIC

Wide beam optic. Frosted polycarbonate lens.

Fixture for single installation equipped with cable L 2mt.

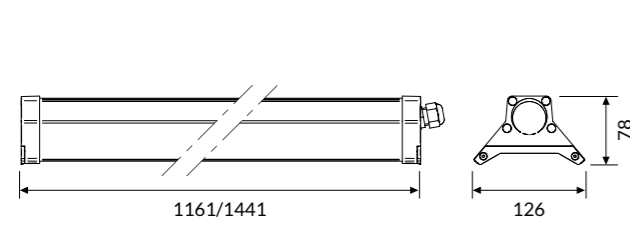

IP 65
IK 08

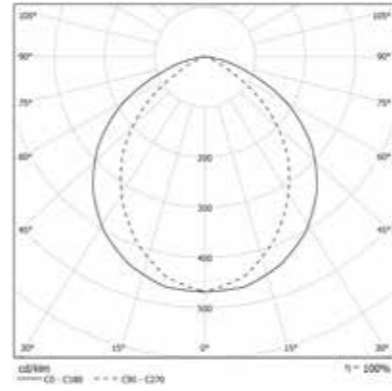

COLOUR TEMPERATURE **4000K**

COD	💡	lm	mm
05WO24L49065	24W	2188	1161
05WO30L49065	30W	2736	1441

3000K


COD	💡	lm	mm
05WO24L39065	24W	2120	1161
05WO30L39065	30W	2650	1441

STILLA WO-FC LOW POWER


OPTIC

Wide beam optic. Frosted polycarbonate lens.

Fixture for continuous-row with quick connector and through wiring.

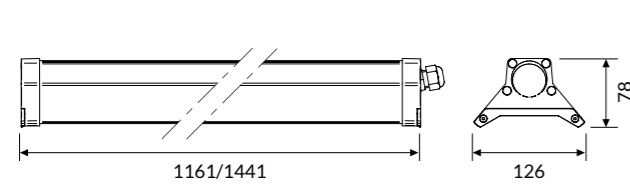

IP 65
IK 08

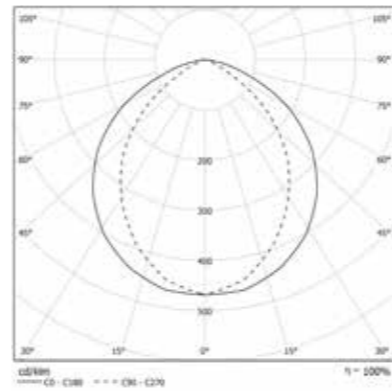

COLOUR TEMPERATURE **4000K**

COD	💡	lm	mm
05WO24L49065FC	24W	2188	1161
05WO30L49065FC	30W	2736	1441

3000K


COD	💡	lm	mm
05WO24L39065FC	24W	2120	1161
05WO30L39065FC	30W	2650	1441

STILLA WA LOW POWER


OPTIC

Wide beam optic. Acrylic lens.

Fixture for single installation equipped with cable L 2mt.

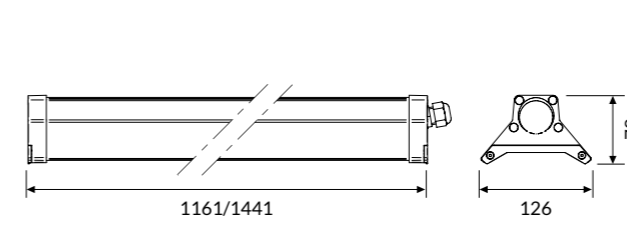

IP 65
IK 08

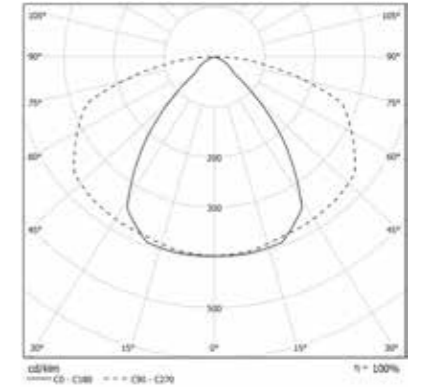

COLOUR TEMPERATURE **4000K**

COD	💡	lm	mm
05WA24L49065	24W	2622	1161
05WA30L49065	30W	3278	1441

3000K


COD	💡	lm	mm
05WA24L39065	24W	2384	1161
05WA30L39065	30W	2983	1441

STILLA WA-FC LOW POWER


OPTIC

Wide beam optic. Acrylic lens.

Fixture for continuous-row with quick connector and through wiring.

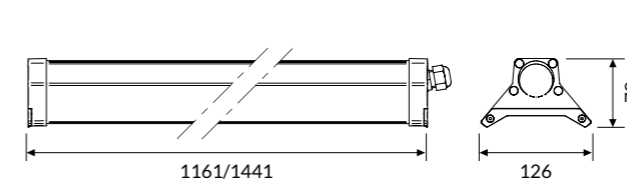

IP 65
IK 08

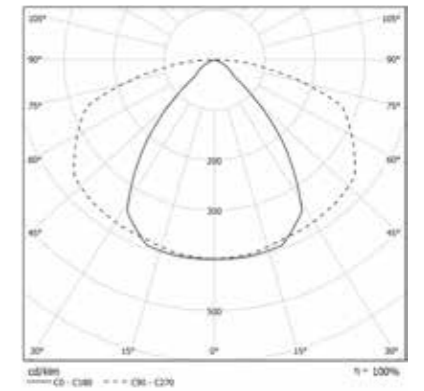

COLOUR TEMPERATURE **4000K**

COD	💡	lm	mm
05WA24L49065FC	24W	2622	1161
05WA30L49065FC	30W	3278	1441

3000K


COD	💡	lm	mm
05WA24L39065FC	24W	2384	1161
05WA30L39065FC	30W	2983	1441

STILLA NB HIGH POWER


OPTIC

Narrow beam optic co-extruded into the main diffuser.

Fixture for single installation equipped with cable L 2mt.

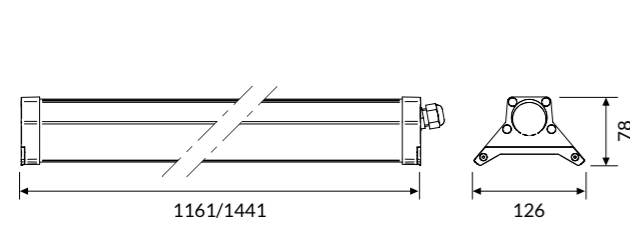

IP 65
IK 08

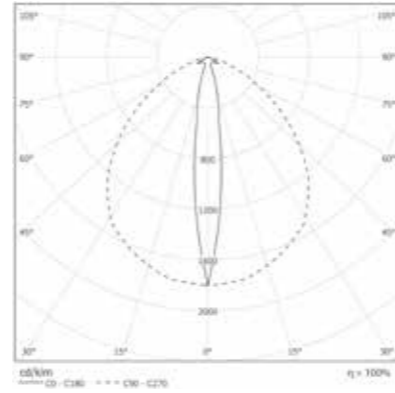

COLOUR TEMPERATURE 4000K

COD	💡	lm	mm
05NB46L49065	46W	4400	1161
05NB57L49065	57W	5452	1441

3000K


COD	💡	lm	mm
05NB46L39065	46W	4307	1161
05NB57L39065	57W	5337	1441

STILLA NB-FC HIGH POWER


OPTIC

Narrow beam optic co-extruded into the main diffuser.

Fixture for continuous-row with quick connector and through wiring.

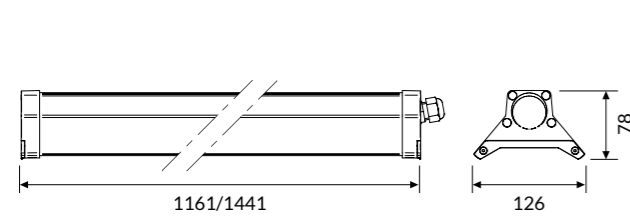

IP 65
IK 08

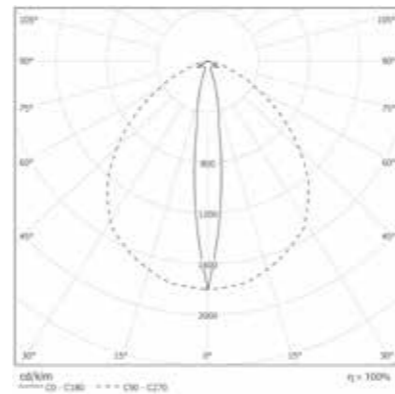

COLOUR TEMPERATURE 4000K

COD	💡	lm	mm
05NB46L49065FC	46W	4400	1161
05NB57L49065FC	57W	5452	1441

3000K


COD	💡	lm	mm
05NB46L39065FC	46W	4307	1161
05NB57L39065FC	57W	5337	1441

STILLA WB HIGH POWER


OPTIC

Wide beam optic co-extruded into the main diffuser.

Fixture for single installation equipped with cable L 2mt.

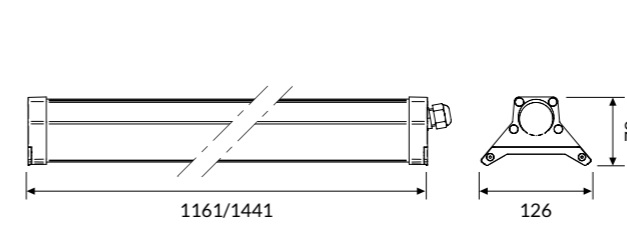

IP 65
IK 08

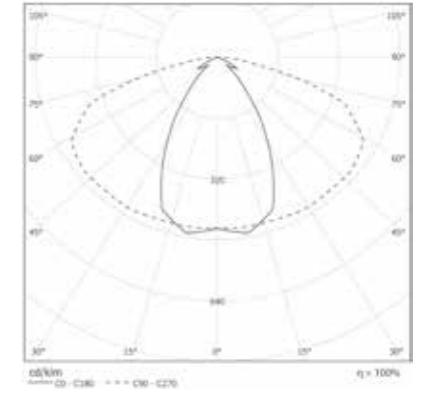

COLOUR TEMPERATURE 4000K

COD	💡	lm	mm
05WB46L49065	46W	4692	1161
05WB57L49065	57W	5815	1441

3000K


COD	💡	lm	mm
05WB46L39065	46W	4600	1161
05WB57L39065	57W	5699	1441

STILLA WB-FC HIGH POWER


OPTIC

Wide beam optic co-extruded into the main diffuser.

Fixture for continuous-row with quick connector and through wiring.

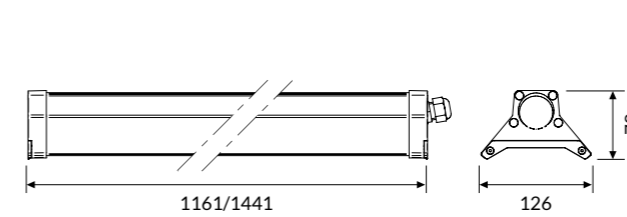

IP 65
IK 08

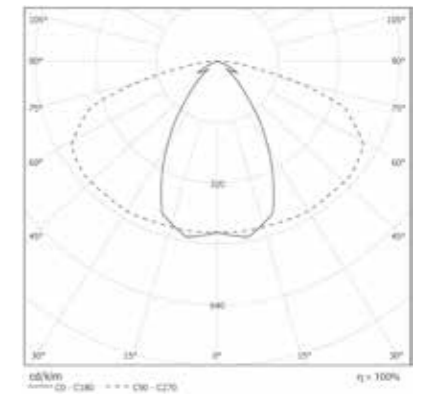

COLOUR TEMPERATURE 4000K

COD	💡	lm	mm
05WB46L49065FC	46W	4692	1161
05WB57L49065FC	57W	5815	1441

3000K


COD	💡	lm	mm
05WB46L39065FC	46W	4600	1161
05WB57L39065FC	57W	5699	1441

STILLA WO HIGH POWER


OPTIC

Wide beam optic. Frosted polycarbonate lens.

Fixture for single installation equipped with cable L 2mt.

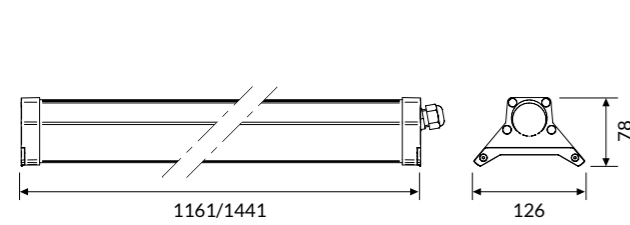

IP 65
IK 08

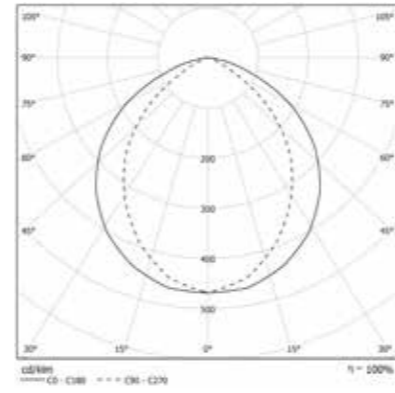

COLOUR TEMPERATURE **4000K**

COD	💡	lm	mm
05WO46L49065	46W	4195	1161
05WO57L49065	57W	5198	1441

3000K


COD	💡	lm	mm
05WO46L39065	46W	4064	1161
05WO57L39065	57W	5036	1441

STILLA WO-FC HIGH POWER


OPTIC

Wide beam optic. Frosted polycarbonate lens.

Fixture for continuous-row with quick connector and through wiring.

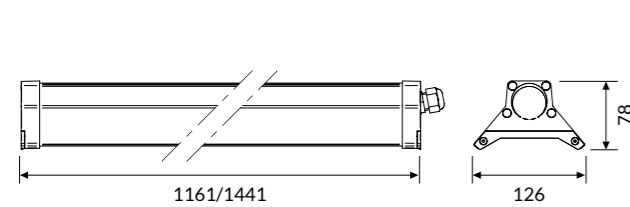

IP 65
IK 08

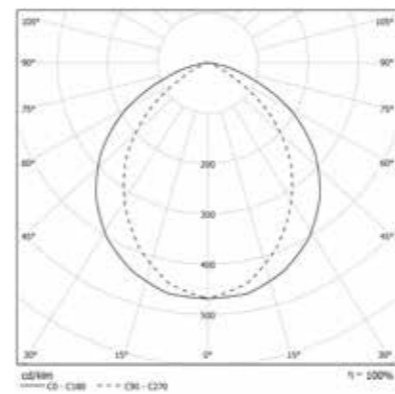

COLOUR TEMPERATURE **4000K**

COD	💡	lm	mm
05WO46L49065FC	46W	4195	1161
05WO57L49065FC	57W	5198	1441

3000K


COD	💡	lm	mm
05WO46L39065FC	46W	4064	1161
05WO57L39065FC	57W	5036	1441

STILLA WA HIGH POWER


OPTIC

Wide beam optic. Acrylic lens.

Fixture for single installation equipped with cable L 2mt.

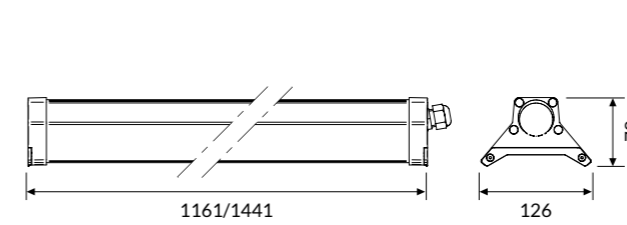

IP 65
IK 08

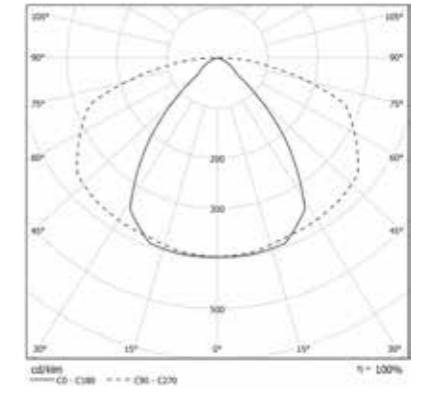

COLOUR TEMPERATURE **4000K**

COD	💡	lm	mm
05WA46L49065	46W	5474	1161
05WA57L49065	57W	6769	1441

3000K


COD	💡	lm	mm
05WA46L39065	46W	4981	1161
05WA57L39065	57W	6160	1441

STILLA WA-FC HIGH POWER


OPTIC

Wide beam optic. Acrylic lens.

Fixture for continuous-row with quick connector and through wiring.

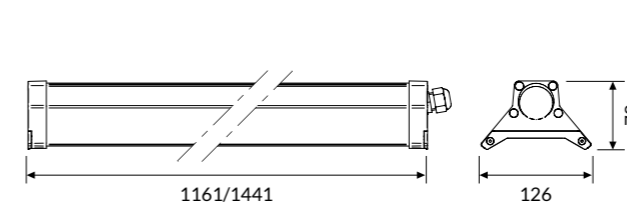

IP 65
IK 08

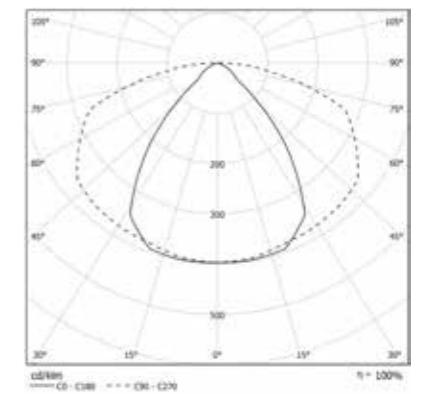

COLOUR TEMPERATURE **4000K**

COD	💡	lm	mm
05WA46L49065FC	46W	5474	1161
05WA57L49065FC	57W	6769	1441

3000K


COD	💡	lm	mm
05WA46L39065FC	46W	4981	1161
05WA57L39065FC	57W	6160	1441

STILLA NB EXTREME POWER


OPTIC

Narrow beam optic co-extruded into the main diffuser.

Fixture for single installation equipped with cable L 2mt.

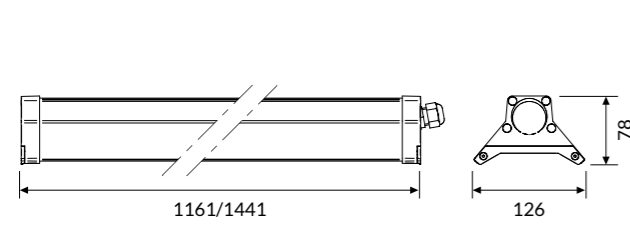

IP 65 A++
IK 08

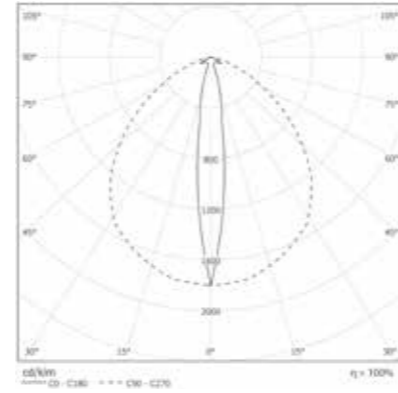

COLOUR TEMPERATURE 4000K

COD	💡	lm	mm
05NB89L49065	89W	9312	1161
05NB110L49065	110W	10979	1441

COLOUR TEMPERATURE 3000K


COD	💡	lm	mm
05NB89L39065	89W	9114	1161
05NB110L39065	110W	10975	1441

STILLA NB-FC EXTREME POWER


OPTIC

Narrow beam optic co-extruded into the main diffuser.

Fixture for continuous-row with quick connector and through wiring.

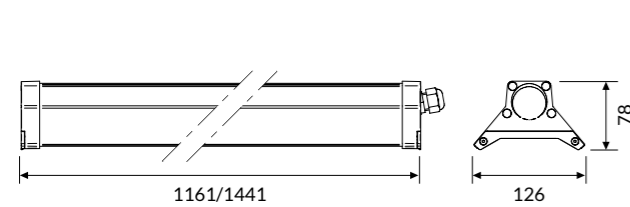

IP 65 A++
IK 08

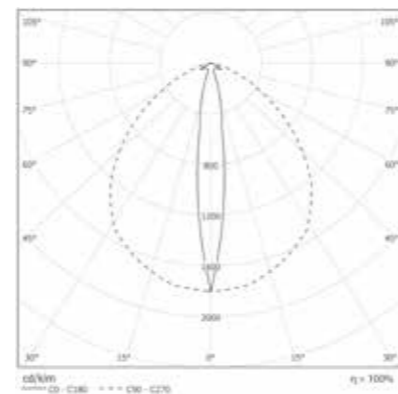

COLOUR TEMPERATURE 4000K

COD	💡	lm	mm
05NB89L49065FC	89W	9312	1161
05NB110L49065FC	110W	10979	1441

COLOUR TEMPERATURE 3000K


COD	💡	lm	mm
05NB89L39065FC	89W	9114	1161
05NB110L39065FC	110W	10975	1441

STILLA WB EXTREME POWER


OPTIC

Wide beam optic co-extruded into the main diffuser.

Fixture for single installation equipped with cable L 2mt.

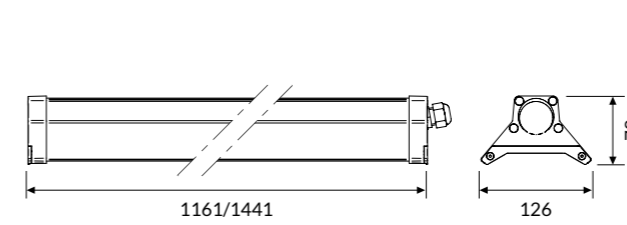

IP 65 A++
IK 08

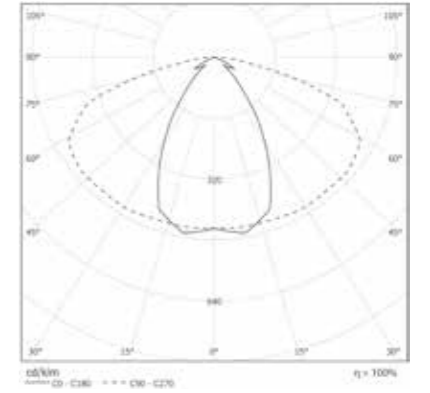

COLOUR TEMPERATURE 4000K

COD	💡	lm	mm
05WB89L49065	89W	10144	1161
05WB110L49065	110W	11960	1441

COLOUR TEMPERATURE 3000K


COD	💡	lm	mm
05WB89L39065	89W	9942	1161
05WB110L39065	110W	11721	1441

STILLA WB-FC EXTREME POWER


OPTIC

Wide beam optic co-extruded into the main diffuser.

Fixture for continuous-row with quick connector and through wiring.

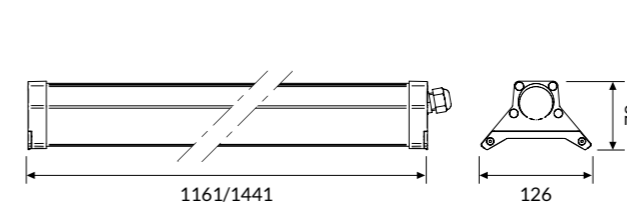

IP 65 A++
IK 08

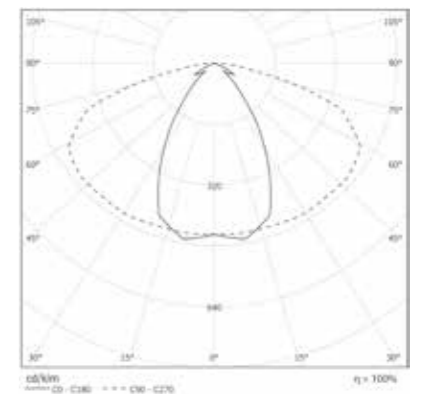

COLOUR TEMPERATURE 4000K

COD	💡	lm	mm
05WB89L49065FC	89W	10144	1161
05WB110L49065FC	110W	11960	1441

COLOUR TEMPERATURE 3000K


COD	💡	lm	mm
05WB89L39065FC	89W	9942	1161
05WB110L39065FC	110W	11721	1441

STILLA WO EXTREME POWER


OPTIC

Wide beam optic. Frosted polycarbonate lens.

Fixture for single installation equipped with cable L 2mt.

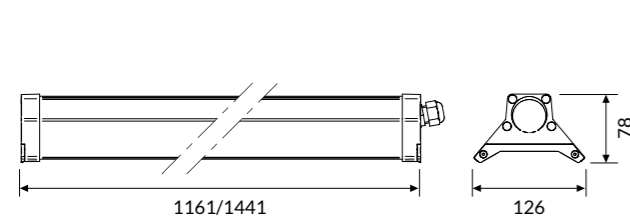

IP 65
IK 08

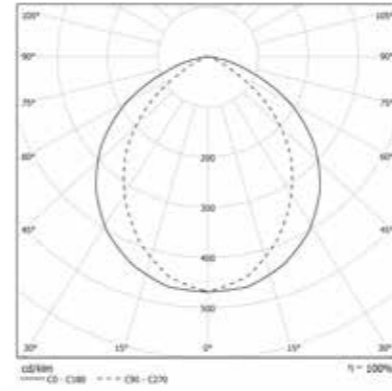

COLOUR TEMPERATURE **4000K**

COD	💡	lm	mm
05WO89L49065	89W	8624	1161
05WO110L49065	110W	10659	1441

3000K


COD	💡	lm	mm
05WO89L39065	89W	8286	1161
05WO110L39065	110W	10241	1441

STILLA WO-FC EXTREME POWER


OPTIC

Wide beam optic. Frosted polycarbonate lens.

Fixture for continuous-row with quick connector and through wiring.

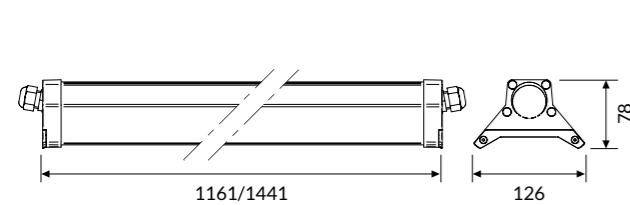

IP 65
IK 08

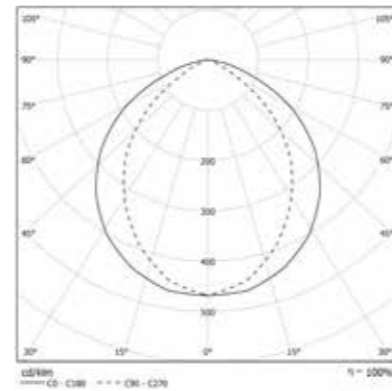

COLOUR TEMPERATURE **4000K**

COD	💡	lm	mm
05WO89L49065FC	89W	8624	1161
05WO110L49065FC	110W	10659	1441

3000K


COD	💡	lm	mm
05WO89L39065FC	89W	8286	1161
05WO110L39065FC	110W	10241	1441

STILLA WA EXTREME POWER


OPTIC

Wide beam optic. Acrylic lens.

Fixture for single installation equipped with cable L 2mt.

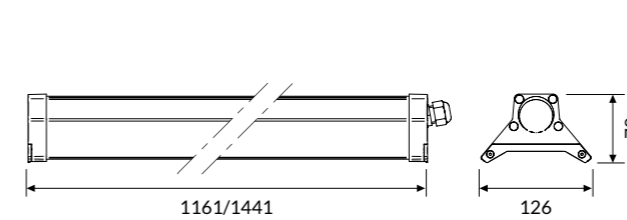

IP 65
IK 08

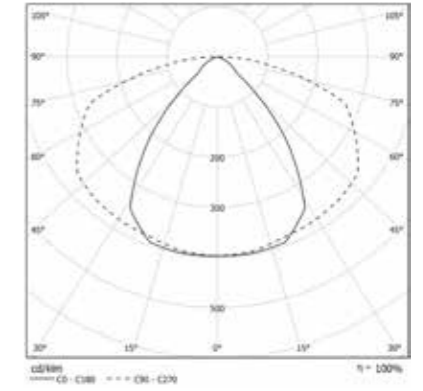

COLOUR TEMPERATURE **4000K**

COD	💡	lm	mm
05WA89L49065	89W	8878	1161
05WA110L49065	110W	10973	1441

3000K


COD	💡	lm	mm
05WA89L39065	89W	8079	1161
05WA110L39065	110W	9985	1441

STILLA WA-FC EXTREME POWER


OPTIC

Wide beam optic. Acrylic lens.

Fixture for continuous-row with quick connector and through wiring.

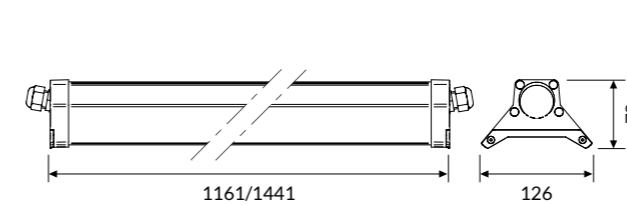

IP 65
IK 08

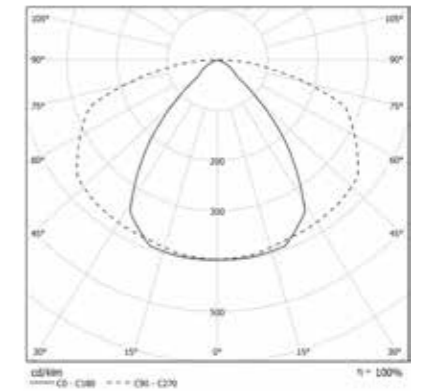

COLOUR TEMPERATURE **4000K**

COD	💡	lm	mm
05WA89L49065FC	89W	8878	1161
05WA110L49065FC	110W	10973	1441

3000K

COD	💡	lm	mm
05WA89L39065FC	89W	8079	1161
05WA110L39065FC	110W	9985	1441



05AA13
Single wire 1500mm adjustable suspension kit.



05AA1330
Single wire 3000mm adjustable suspension kit.




05AA14
Spacers kit for ceiling mounting.



05AA11
Bracket for continuous rows installation length 1500mm.




05AA15
Brackets kit for wall installation.




05AAVTS: 1161mm
05AAVTL: 1441mm
Transparent protective glass.

CONTINUOUS ROWS INSTALLATION EXAMPLE

Continuous rows installation is very easy thanks to the practical connectors included.

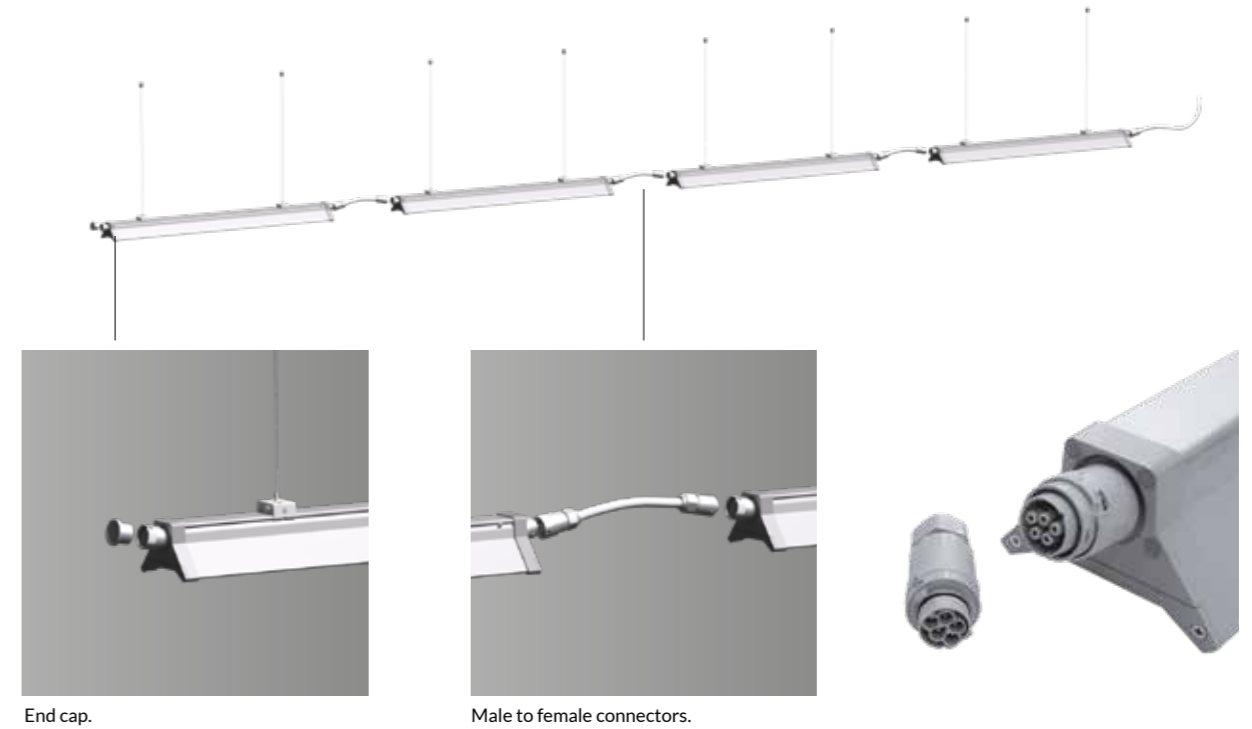

EXAMPLE OF CONTINUOUS ROWS INSTALLATION WITH 05AA11 ACCESSORY

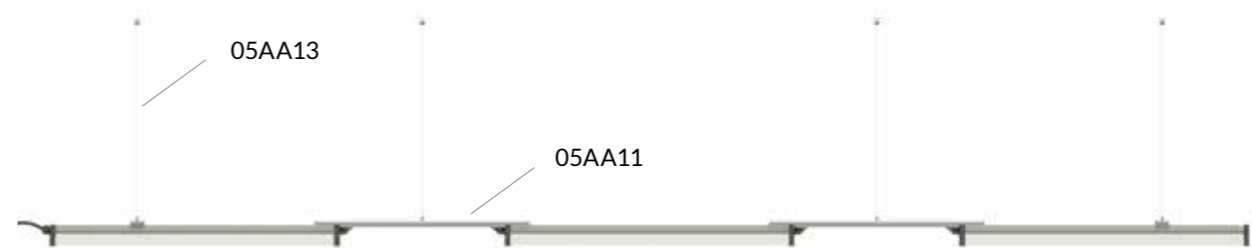

Thanks to the 05AA11 accessory you can install the devices in suspended continuous line by avoiding the use of busbars or cable raceways.

This bracket serves as the mechanical joining, allows the masking of the connection cable between 2 devices and reduces the suspension points. It is click fixed on the devices and can be cut at the construction site.