

STYLO LV

ID CODE: 88

Miniature pendant fixture with a clean and elegant design. Perfectly suited for use with Esse-ci 48V low voltage track system. The LED light source is deep set, providing optimum glare control and visual comfort (CUT-OFF <30°).




See also:

STYLO ceiling p. 160
LV TRACK p. 354









Design
esse-ci

FEATURES

-  Direct Emission
-  UGR <19
-  IP 40




LED

-  3000K/4000K
-  >72 lm/W
-  CRI >90
-  Eye safety: RG0/RG1
-  Mac Adams 3
-  L80/B10 >50.000h

CERTIFICATIONS

-  CE
-  A+
-  5 years warranty

ON REQUEST

-  DALI - RDD code (verify the version)
-  2700K - 5000K
-  ETL READY

Optic


- Polycarbonate lens from 25°-40° beam angle.
- Honeycomb lens
- Additional PG diffuser

Body

Body in die-cast aluminium with epoxy powder coating

Colour

- White RAL 9003 wrinkled - Code: W
- Black RAL 9005 wrinkled - Code: BK

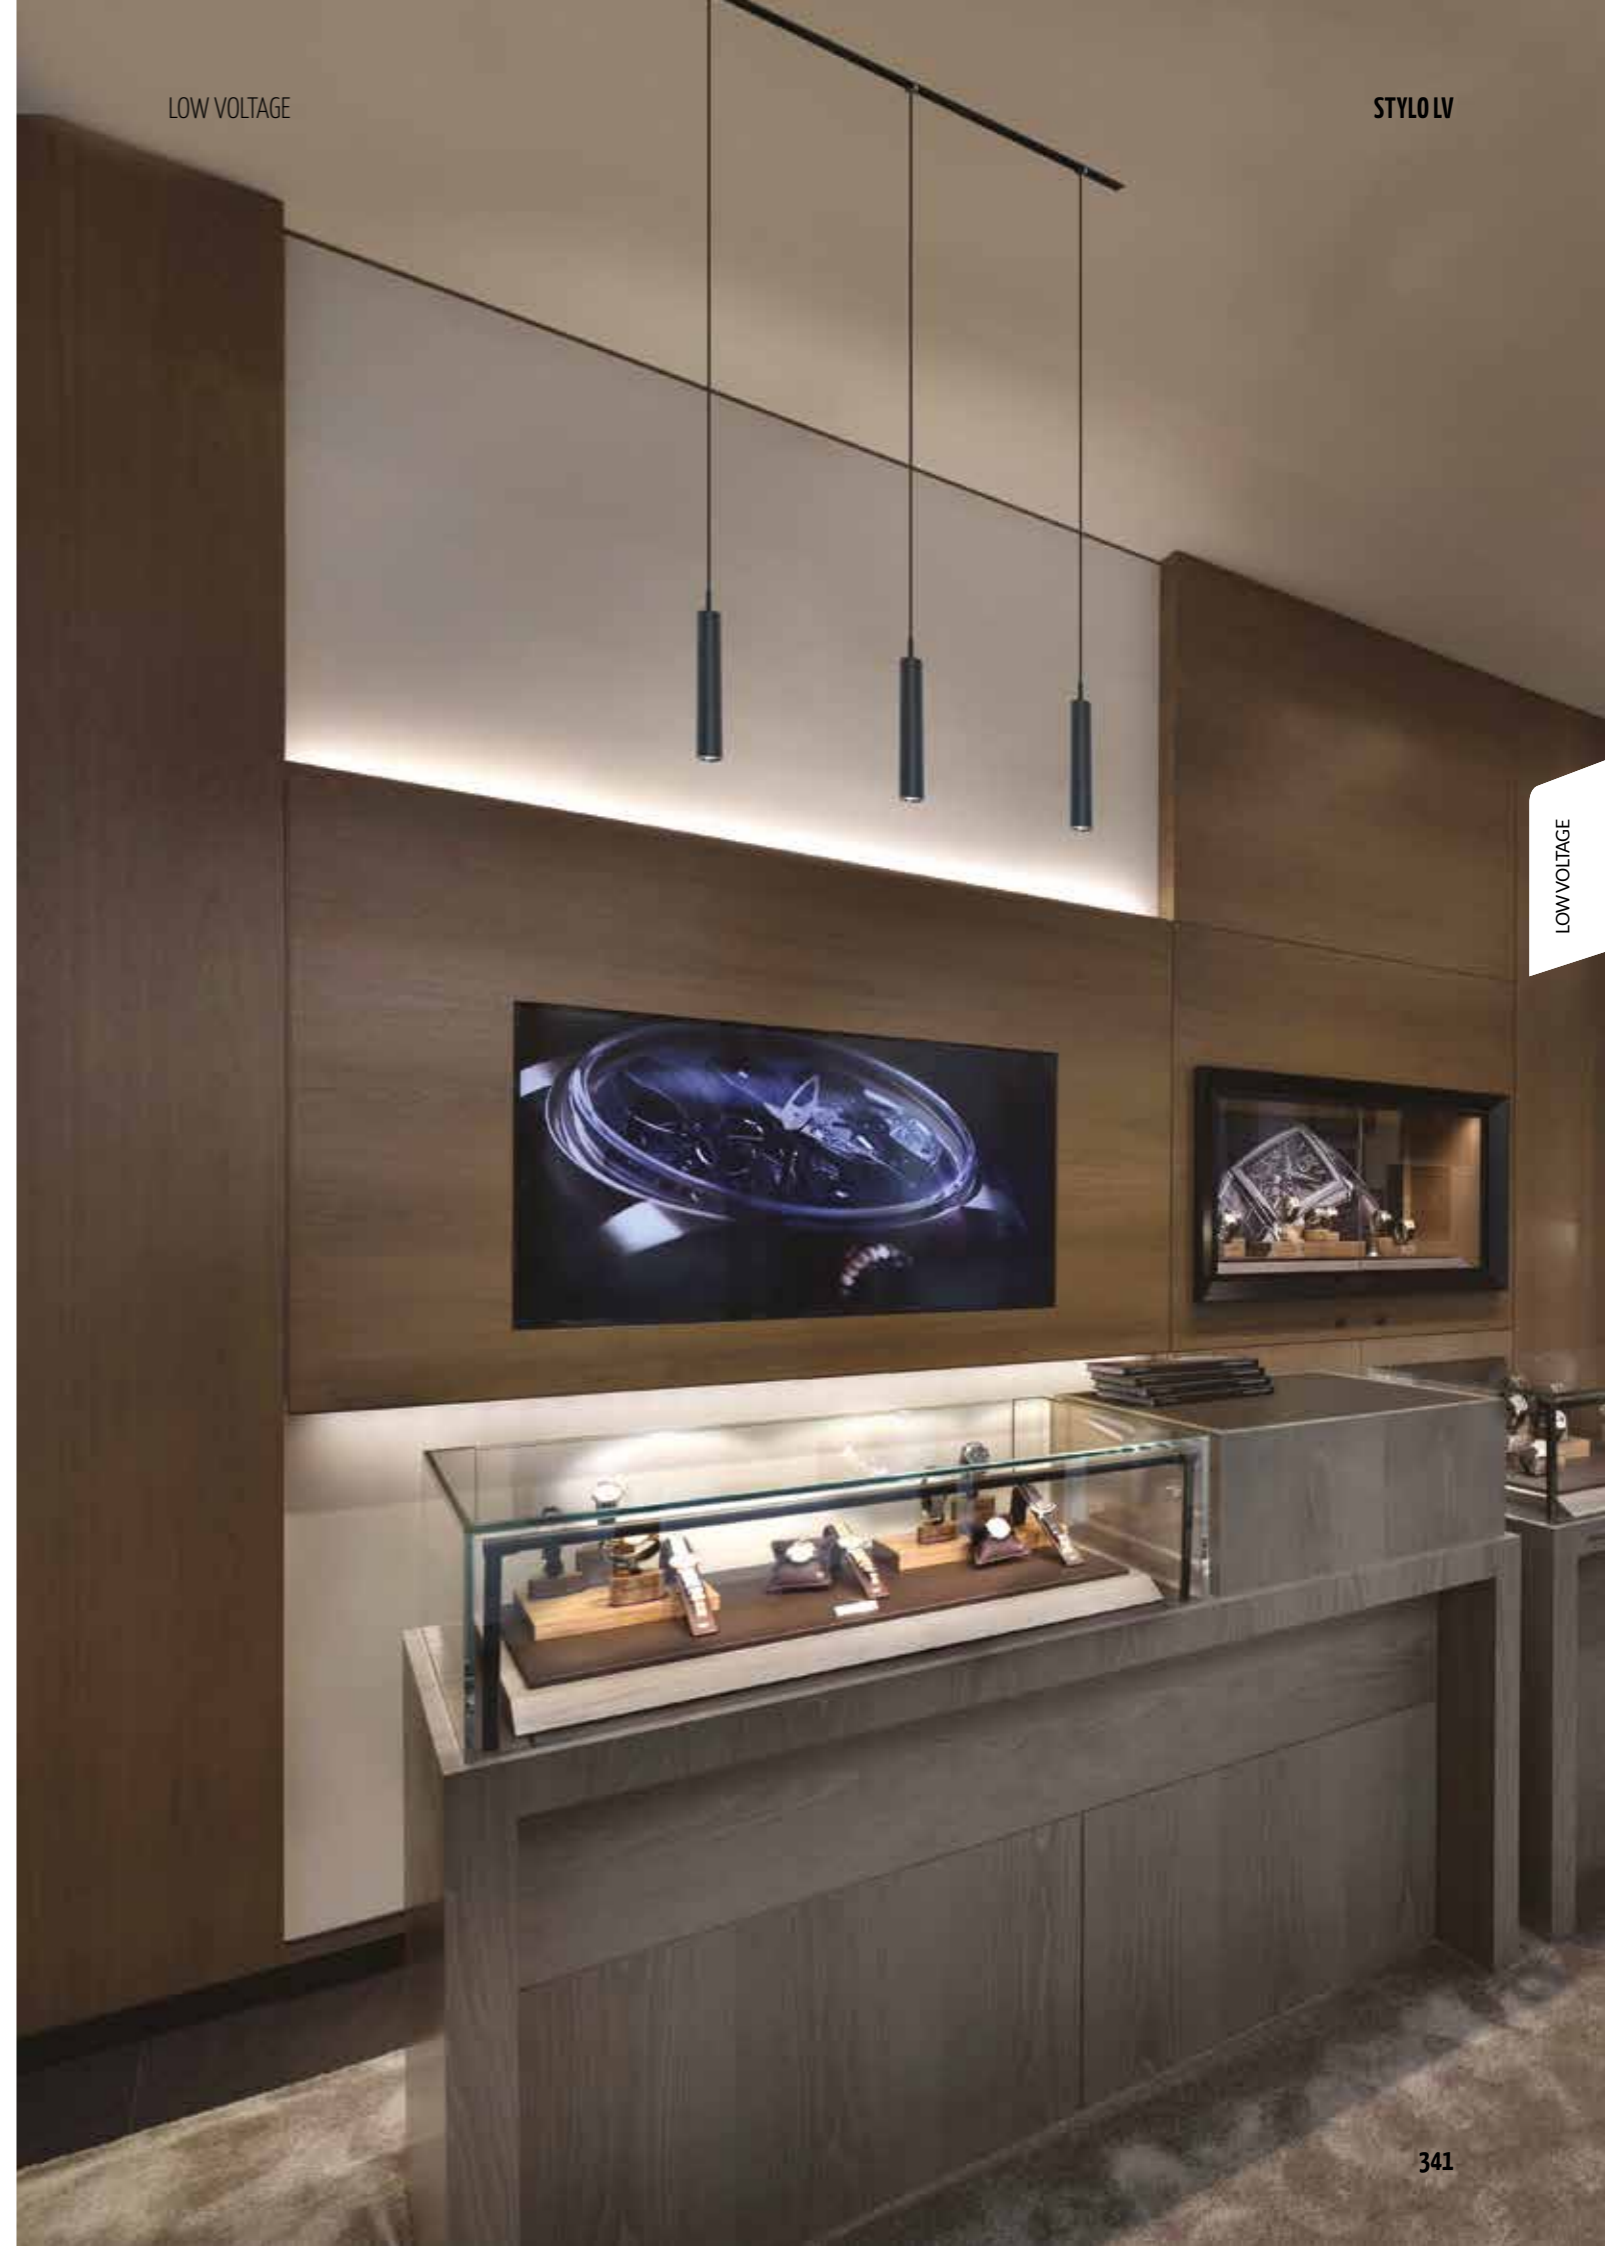


STYLO

OPTIC


Polycarbonate lens from 25°-40° beam angle.

Complete with 1.5mt cable.

Needs powered box: see accessories on p.343.

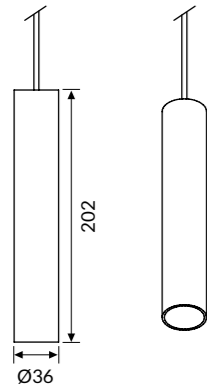

IP 40 A+

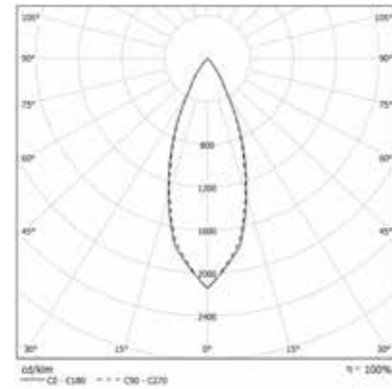

Accessories



88AA16ABLV
Power for Low Voltage 48V track.



88AA16ABLVD
Power for Low Voltage 48V track, DALI version.



88AAND
Honeycomb lens.



88AASD
Additional PG diffuser.

COLOUR TEMPERATURE

4000K

3000K

COD	💡	lm	Ø (mm)
88PC5L49025	5W 25°	360	36
88PC5L49040	5W 40°	360	36
88PC8L49025	8W 25°	574	36
88PC8L49040	8W 40°	574	36

COD	💡	lm	Ø (mm)
88PC5L39025	5W 25°	318	36
88PC5L39040	5W 40°	318	36
88PC8L39025	8W 25°	508	36
88PC8L39040	8W 40°	508	36