


# STYLO

## OPTIC


Polycarbonate lens from 25°-40° beam angle.

Complete with 1.5mt cable.

Needs powered box: see accessories on p.343.

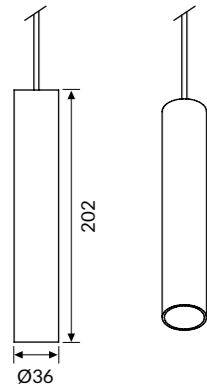

IP 40 A+

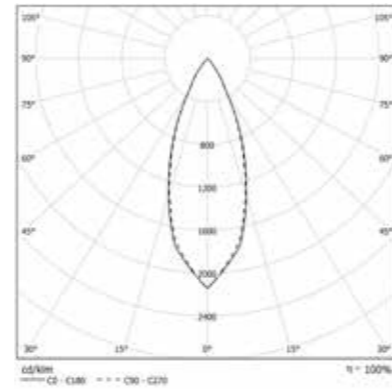

## Accessories



**88AA16ABLV**  
Power for Low Voltage 48V track.



**88AA16ABLVD**  
Power for Low Voltage 48V track, DALI version.



**88AAND**  
Honeycomb lens.



**88AASD**  
Additional PG diffuser.

### COLOUR TEMPERATURE

4000K

3000K

COD	💡	lm	Ø (mm)
88PC5L49025	5W 25°	360	36
88PC5L49040	5W 40°	360	36
88PC8L49025	8W 25°	574	36
88PC8L49040	8W 40°	574	36

COD	💡	lm	Ø (mm)
88PC5L39025	5W 25°	318	36
88PC5L39040	5W 40°	318	36
88PC8L39025	8W 25°	508	36
88PC8L39040	8W 40°	508	36