

# STYLO

ID CODE: 88

Suspended miniaturized fixture with a clean and elegant design. Stylo can be installed **individually**, or onto **three-phase** or **low voltage 48V** tracks. CUT OFF >30° for glare control and a great comfort.

See also:




STYLO LV

p. 340









Design  
esse-ci

## FEATURES

-  Direct Emission
-  UGR < 19
-  IP 40



## LED

-  3000K/4000K
-  >72 lm/W
-  CRI > 90
-  Eye safety: RG0/RG1
-  Mac Adams 3
-  L80/B10 >50.000h

## CERTIFICATIONS

-  CE
-  A+
-  5 years warranty

## ON REQUEST

-  DALI - RDD code (verify the version)
-  2700K - 5000K

## Optic

- Polycarbonate lens from 25°-40° beam angle
- Honeycomb lens
- Additional PG diffuser

## Body

Body in die-cast aluminium with epoxy powder coating

## Colour


- White RAL 9003 wrinkled - Code: W
- Black RAL 9005 wrinkled - Code: BK




OPTIC

Polycarbonate lens from 25°-40° beam angle.

Complete with 1.5mt cable.  
Needs powered box: see accessories on p.163.

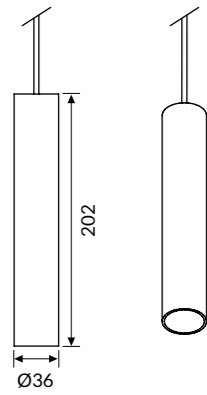

IP 40 A+

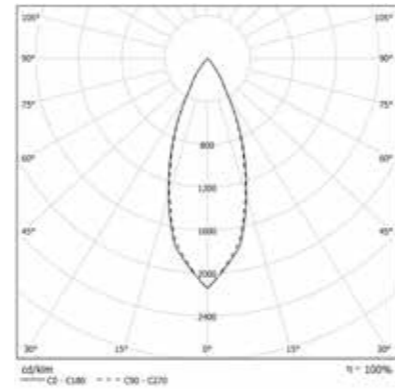

COLOUR TEMPERATURE

4000K

3000K

COD	Light Bulb Icon	lm	Ø (mm)
88PC5L49025	5W 25°	360	36
88PC5L49040	5W 40°	360	36
88PC8L49025	8W 25°	574	36
88PC8L49040	8W 40°	574	36

COD	Light Bulb Icon	lm	Ø (mm)
88PC5L39025	5W 25°	318	36
88PC5L39040	5W 40°	318	36
88PC8L39025	8W 25°	508	36
88PC8L39040	8W 40°	508	36

Accessories



**88AA16**  
Built-in driver box power for for ceiling version.



**88AA16RDD**  
Built-in driver box power for for ceiling version, DALI version.



**88AA16R**  
Box power for recessed installation on plasterboard.



**88AA16RRDD**  
Box power for recessed installation on plasterboard, DALI version.



**88AAND**  
Honeycomb lens.



**88AASD**  
Additional PG diffuser.