


STYLO


OPTIC

Polycarbonate lens from 25°-40° beam angle.

Complete with 1.5mt cable.
Needs powered box: see accessories on p.163.

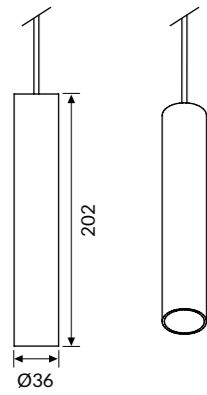

IP 40 A+

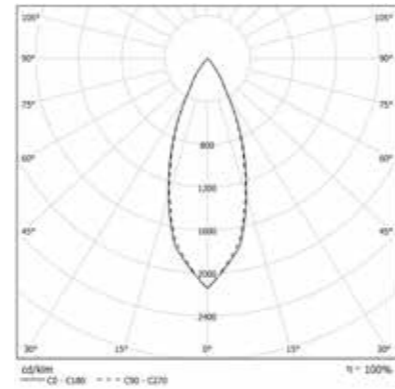

Accessories



88AA16
Built-in driver box power for for ceiling version.



88AA16RDD
Built-in driver box power for for ceiling version, DALI version.



88AA16R
Box power for recessed installation on plasterboard.



88AA16RRDD
Box power for recessed installation on plasterboard, DALI version.



88AAND
Honeycomb lens.



88AASD
Additional PG diffuser.

COLOUR TEMPERATURE

4000K

3000K

COD	💡	lm	Ø (mm)
88PC5L49025	5W 25°	360	36
88PC5L49040	5W 40°	360	36
88PC8L49025	8W 25°	574	36
88PC8L49040	8W 40°	574	36

COD	💡	lm	Ø (mm)
88PC5L39025	5W 25°	318	36
88PC5L39040	5W 40°	318	36
88PC8L39025	8W 25°	508	36
88PC8L39040	8W 40°	508	36