



TERES IP66 SMALL

OPTIC

Internal aluminum reflectors:
10°- 20°- 40° - 50° beam angles.



IP 66 A+

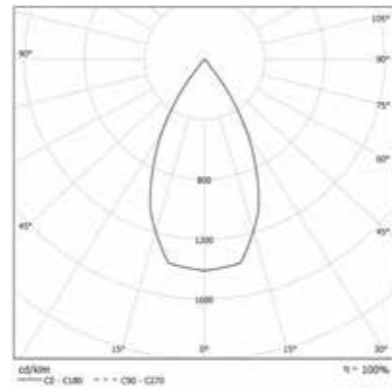

COLOUR TEMPERATURE


3000K

COD	💡	lm
14VT18L310S66	18W 10°	1945
14VT18L320S66	18W 20°	1945
14VT18L340S66	18W 40°	1945
14VT18L350S66	18W 50°	1945


TERES IP66 MEDIUM

OPTIC

Internal aluminum reflectors:
10°- 20°- 40° - 70° beam angles.

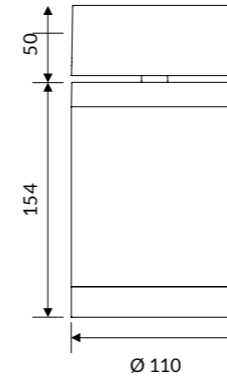

IP 66 A+

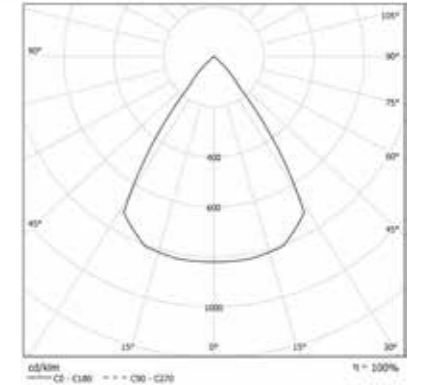

COLOUR TEMPERATURE

3000K

COD	💡	lm
14VT31L310M66	31W 10°	3286
14VT31L320M66	31W 20°	3286
14VT31L340M66	31W 40°	3286
14VT31L370M66	31W 70°	3286

Accessories



14AA21S
TERES IP66 SMALL.
Ground installation spike.



14AA21M
TERES IP66 MEDIUM.
Ground installation spike.

Technical Note



Graduated adjustment.