

WAVE DISPLAY

ID CODE: 85

Soft-line design for a truly versatile range: WAVE is suitable both as an element for single installation and as a system for continuous suspended or recessed rows. Direct/indirect emission with High Contrast microcell optical system and high glare control.




See also:

WAVE p. 34








Design
esse-ci

FEATURES

-  Direct Emission
-  UGR <16
-  IP 40

LED

-  3000K/4000K
- >107lm/W icon" data-bbox="157 558 170 575"/> >107lm/W
-  CRI >90
-  Eye safety: RG0/RG1
-  Mac Adams 3
-  L80/B10 >50.000h

CERTIFICATIONS

-  CE
-  A++
-  5 years warranty

ON REQUEST


-  DALI - RDD code (verify the version)

Specifications Built-in driver.

Optic High Contrast diffuser UGR <16.

Body Aluminium body with epoxy powder coating.

Colour White RAL 9003 - Code: B
 Black RAL 9005 - Code: C8

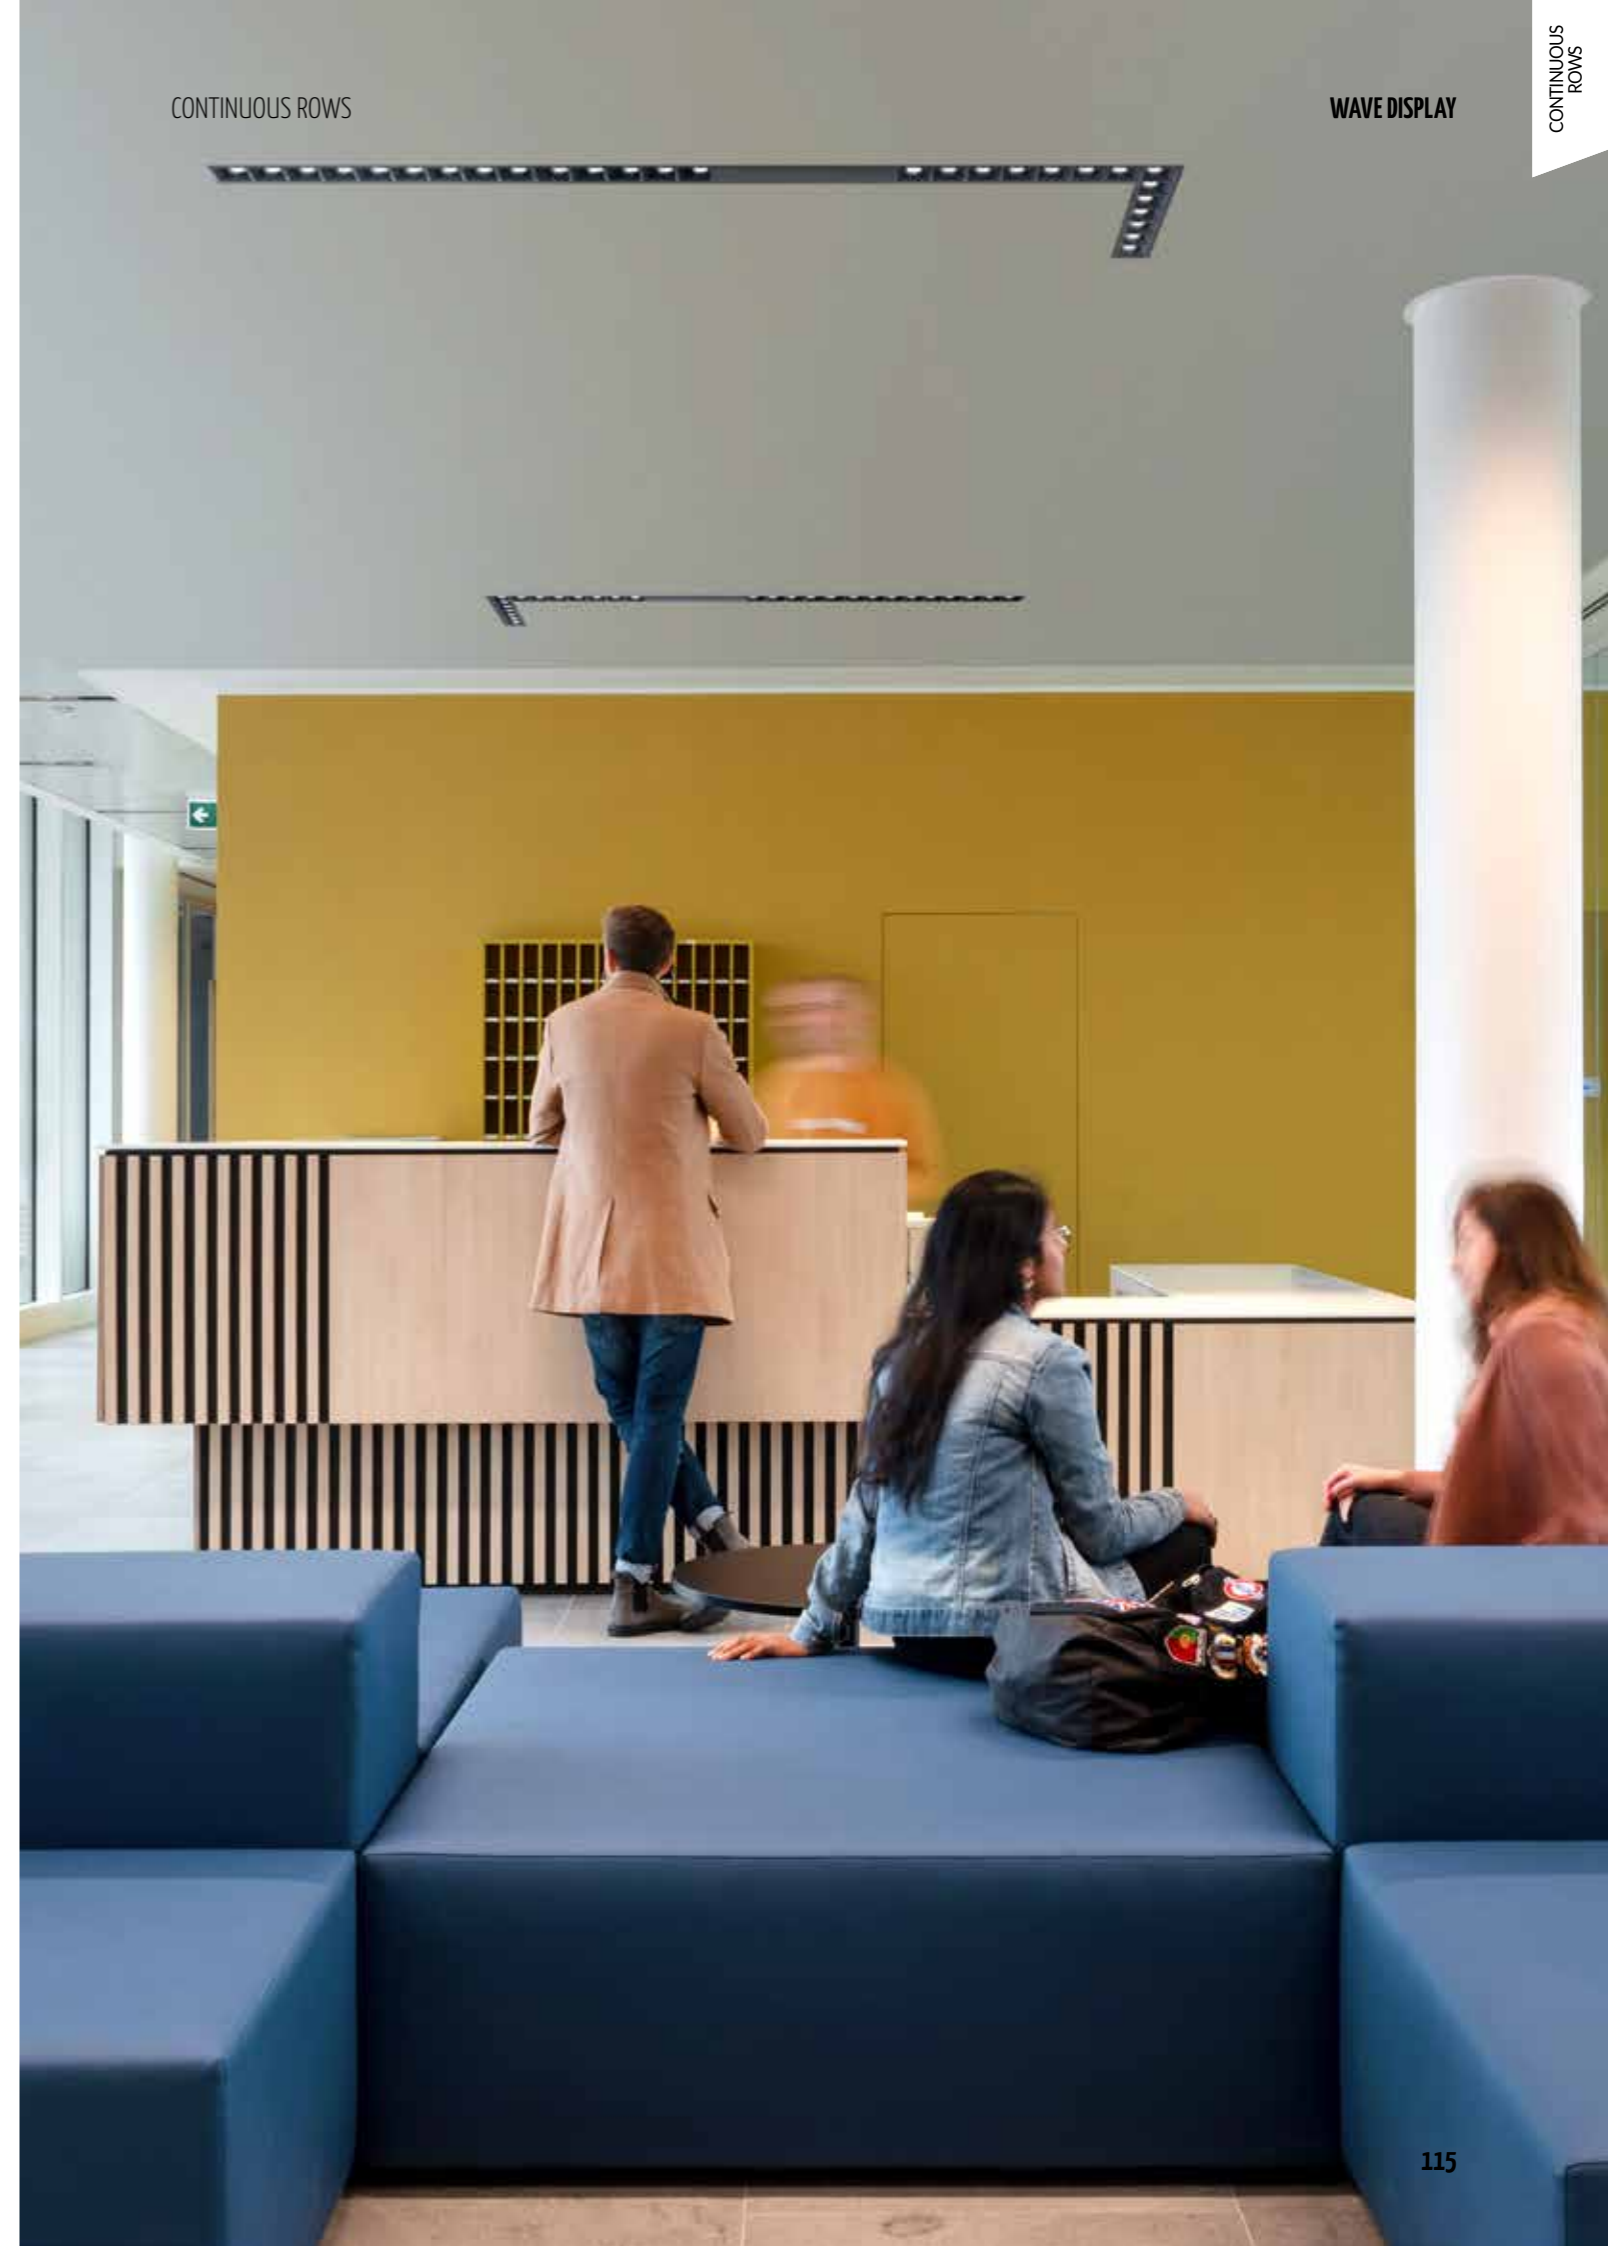


WAVE DISPLAY


OPTIC

High Contrast diffuser UGR < 16.

End caps not included. See accessories on p. 117.

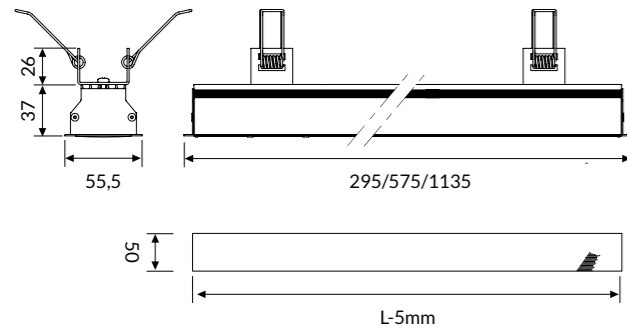

IP 40 A++

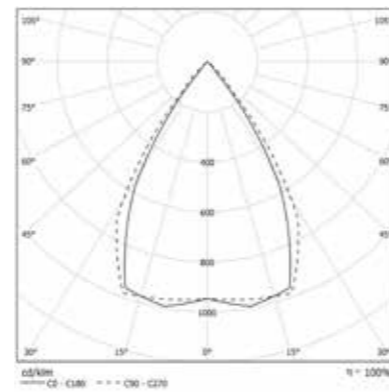

COLOUR TEMPERATURE

4000K

COD	💡	lm	mm
85DR9DKL490R	9W	965	295
85DR18DKL490R	18W	1926	575
85DR36DKL490R	36W	3852	1135

3000K




COD	💡	lm	mm
85DR9DKL390R	9W	897	295
85DR18DKL390R	18W	1791	575
85DR36DKL390R	36W	3582	1135

WAVE DISPLAY 90°


OPTIC

High Contrast diffuser UGR < 16 and upper diffuser for direct emission.

End caps not included. See accessories on p. 117.

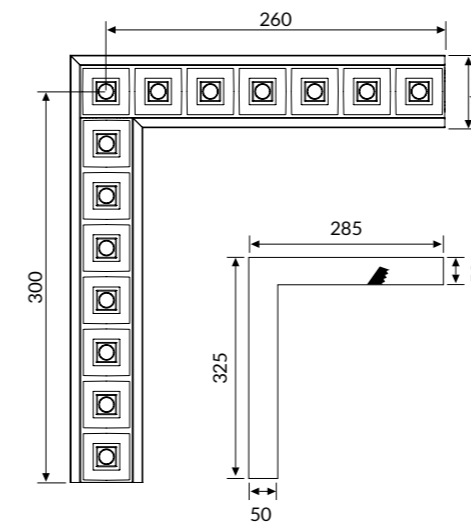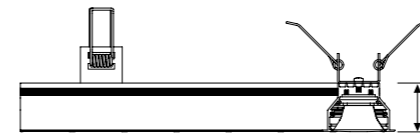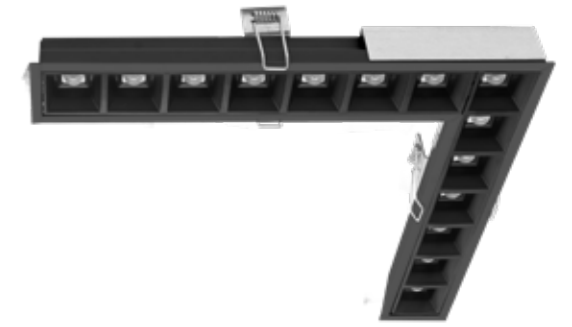

IP 40 A++

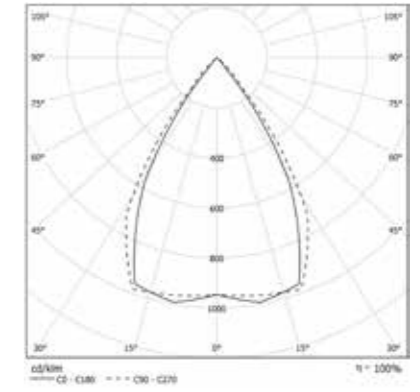

COLOUR TEMPERATURE

4000K

3000K

COD	💡	lm	mm
85DR18DKL490A90R	18W	1926	260X300

COD	💡	lm	mm
85DR18DKL390A90R	18W	1791	260X300

Accessories

RECESSED



85AA09R

End cap kit for recessed version.



85AA11R

Linear joint for recessed version.